SÜDWEST

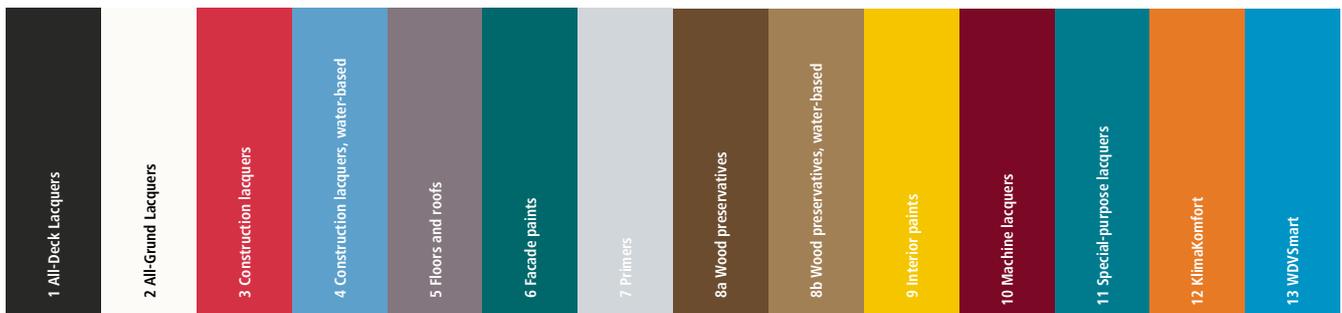BY PROFESSIONALS FOR PROFESSIONALS
PRODUCT PORTFOLIO 2024/2025

A FRESH BRAND FOR SÜDWEST

SÜDWEST

We are ready to face the future, and we have a clear vision of where it is taking us. This means we are creating a new brand image that reflects our enhanced profile and shows that we are not only committed to upholding our traditional values – and are proud of what we have already achieved – but are also approaching the future with a sense of boldness and curiosity. The new SÜDWEST Corporate Design has been developed in collaboration with many of our employees on the basis of workshops, market studies, and lots of hard work.

We have also decided to take a big step forward by revising our packaging. We are keenly aware of how important our packaging design is to our retail and trade partners – and the fact that it serves as a guide to the SÜDWEST product portfolio, so we have made improvements to how it achieves this. Part of this involves allocating a whole range of familiar colours to the product groups that customers have come to know. This overhaul is an extensive process, so we will be moving each container over to the new design gradually.

| 1 All-Deck Lacquers | 2 All-Grund Lacquers | 3 Construction lacquers | 4 Construction lacquers, water-based | 5 Floors and roofs | 6 Facade paints | 7 Primers | 8a Wood preservatives | 8b Wood preservatives, water-based | 9 Interior paints | 10 Machine lacquers | 11 Special-purpose lacquers | 12 KlimaKomfort | 13 WDVSmart |

Each colour represents a product group

THE LABEL
A NEW SYSTEM

PAIL

The background colour of the label makes it easier to identify the product.

Safety instructions

Product name

Product description in multiple languages: German, French, Dutch, Italian.

Key figure: the last three digits in the product number. A number is often easier to remember than a product name.

Product information on the properties, area of application, substrate, storage, and notes

Application pictograms

The QR code provides quick access to the product page.

SÜDWEST

PROFI XXL

006

• Einschicht-Dispersionsfarbe
• Peinture en dispersion monocouche
• Eenlaagse dispersieverf
• Pittura a dispersione monostrato

TINS

The background colour divides products into categories such as wood preservation products and construction lacquers, allowing them to be identified more quickly (see the overview).

Product name

Key figure: the last three digits in the product number. This simplifies communication on the construction site and the information provided in orders.

The QR code provides quick access to the product page.

These symbols provide information on the quality of the technology or similar. You'll recognise them from our product portfolio.

Product description in multiple languages: German, French, Dutch, Italian.

Details of the ingredients and all other information can be found on the rear side of the tin, as before.

SÜDWEST

ALL-GRUND

360

• Universalgrundierung
• Couche d'impression universelle
• Universele grondering
• Mano d'ancoraggio universale

2,5 l

DAS ORIGINAL

THE THREE PILLARS OF SUSTAINABILITY

As part of our Strategy 2025, we have started developing a sustainability concept based on three pillars:

## Environment and climate, employees and society, and our customers.

Working on this basis, we are engaging in short-term, medium-term, and long-term activities that are designed to improve the impact we have on the environment. A holistic approach, it touches on every area in which we as a company have influence and on every stage of our value chain. We are working in project groups to develop individual measures and set out specific steps for us to take.
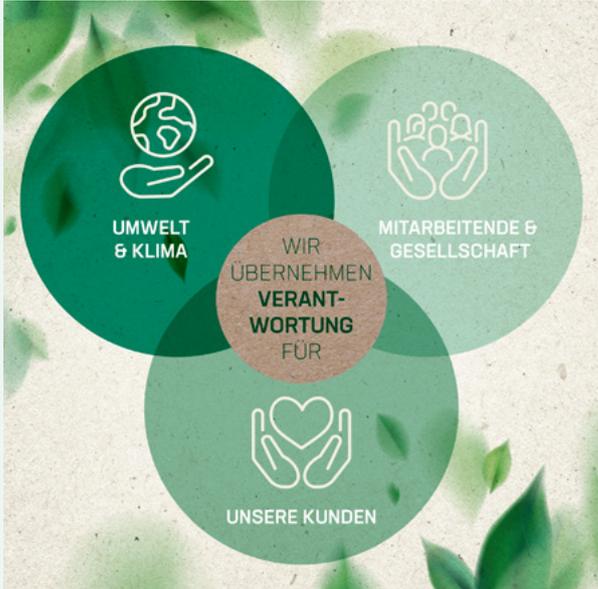
SUSTAINABLE PRODUCTS
FROM SÜDWEST

Inspired by Mother Nature –
Bionics products

Some ideas are so good that it would be a shame not to mimic them. In our bionics products, we've drawn inspiration from the principles we see at work in nature. Modelled on the fog-basking beetle from the Namib desert in Africa, our Drytec® facade paints ensure that dew and fog run off surfaces in no time at all, keeping them dry, clean, and free from algae. SÜDWEST Lotusan® and SÜDWEST Lotusan® Therm, meanwhile, are water-repellent facade paints inspired by the lotus flower. They stop algae and fungi from growing on them, keeping surfaces clean over the long term.
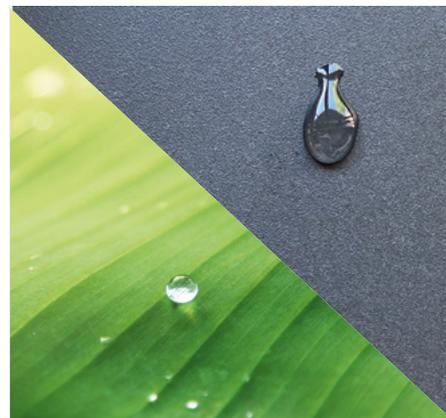
Environmentally friendly paints
and high-tech organic quality

SÜDWEST has developed coatings that are not only free from plasticisers, preservatives, and solvents, but also boast a low volatile organic compound content – for environmentally friendly ambient interior climates that are low in harmful substances and promote healthy living. The silicate interior paints are especially eco-friendly and compatible with a healthy environment, making them suitable for sensitive areas such as bedrooms, rooms occupied by allergy sufferers, and nursery schools. In 2021, some of our interior coatings were awarded neutral certification from the natureplus® institute, whose certification process not only considers the ingredients used in products, but also focuses heavily on whether products have clean, energy-efficient production methods, can be recycled, have health-friendly properties, and are manufactured in a way that conserves resources.

Water-based systems with
outstanding quality

Water-based coating materials have been a mainstay of our range for many years now – and the selection we offer grows as each year passes. These materials contain a much lower proportion of organic solvents than their solvent-containing counterparts, reducing their impact on the environment. This means that they often fail to live up to the same outstanding quality – but we have managed to develop water-based versions that are more than a match for solvent-containing materials.

QUALITY **FEATURES**

All-Color Mix
The products can be tinted in nearly every colour shades for a surcharge at the factory or in tinting facilities at SÜDWESTs trading partners.

Dendrimer technology
The products are based on dendrimer technology. This results in higher quality with better flow properties despite a lower solvent content.

UV PLUS technology
The products are based on UV PLUS technology – the new generation of alkyd resin lacquers. This results in better adhesion, high elasticity, and excellent colour stability.

PU hybrid technology
The products are based on PUR hybrid technology. combining the benefits of two different binders. This results in optimal flow properties and extremely durable surfaces.

PU technology – airless lacquers
The products are based on PUR technology and are used for the airless paints.

White titanium
This innovative, patent-pending technology creates enhanced whiteness and improved hiding power.

Hiding power class
The number in the signet indicates the hiding power class of the interior paint.

Wet-scrub resistance class
The number in the signet indicates the wet-scrub resistance class of the interior paint.

Preservative-free
The products are free from preservatives and, hence, free from any ingredients that trigger allergies.

Low-emission and solvent-free
The products are low-emission and totally free of solvents and plasticisers.

Suitable for toys
The products have a certificate in accordance with EN 71-3 (toy standard) on the migration of heavy metals.

Resistant to disinfectants
The products are resistant to surface disinfectants which are frequently used in hospitals and doctors' surgeries. The certificate is available on request.

Resistant to saliva and sweat
(in accordance with DIN 53160)

Committee for Health-related Evaluation of Building Products
The products comply with the guidelines of the AgBB evaluation scheme of the German Federal Environment Agency.

natureplus® seal of quality
The products meet extremely strict criteria regarding the environment, health, and functionality – and are of course free from any ingredients that trigger allergies.

TÜV SÜDWEST
The products have been tested and the presence of harmful substances has been minimised. Test certificates are available on request.

CONTENTS

LACQUERS AND WOOD COATINGS

LACQUERS AND WOOD COATINGS

PRODUCTS FOR SUBSTRATE PREPARATION FOR LACQUERS AND WOOD COATINGS

CONSTRUCTION LACQUERS
Construction lacquers, solvent-containing
– Primers and undercoat lacquers
– Finishing lacquers
Construction lacquers, water-based
– Primers and undercoat lacquers
– Finishing lacquers
– Spray lacquers
– Clear coating materials

MACHINE LACQUERS
– Primers and fillers
– Machine lacquers, single-component
– Machine lacquers, two-component
– Hardeners, thinners, and additional products

SPECIAL-PURPOSE LACQUERS

WOOD COATINGS
– Primers and preliminary materials
– Wood Stains
– Oils
– Clear coating materials
– Covering coatings

AGENT FOR SUBSTRATE PREPARATION

PRODUCT NO. 30007		**ENTLACKER** PAINT REMOVERS		

Entlacker is a paint remover based on an slowly evaporating solvent.

Properties: for removing lacquer and paint coats, simple application, removes several layers in one go
Consumption: approx. 500 ml/m²
Farbton:
light brownish

	Item/ pallet	Packaging unit
	528	**6 x 1 l**
	100	**3 l**

PRODUCT NO. 30485		**SCHIMMEL-FRESSER** CLEANING AGENTS		

Schimmel-Fresser is a spray for removing mould, mould stains, bacteria, and algae.

Properties: bleaching effect, reacts within minutes
Consumption: approx. 100 ml/m²
Substrate: Tiles, joints, walls, ceilings, masonry, timber, and plastics
Farbton:
colourless
Warning: The product contains biocides. Use biocides with care. Always read the label and product information before use.

	Item/ pallet	Packaging unit
	2048	**8 x 250 ml**
	480	**12 x 500 ml**
	60	**10 l**

PRODUCT NO. 30605		**ZINK- UND KUNSTSTOFF-REINIGER** CLEANING AGENT FOR ZINC AND PLASTICS		

Zink- und Kunststoff-Reiniger is a ready-to-use cleaning agent for substrates made of zinc and plastic.

Properties: in accordance with the BFS data sheet 5 and 22, removal of grease and dirt, removal of release agents and corrosion residues
Consumption: approx. 100 ml/m²
Farbton:
colourless

	Item/ pallet	Packaging unit
	780	**6 x 500 ml**
	504	**6 x 1 l**
	144	**5 l**

PRODUCT NO. 30610		**KUPFER- UND ALU-REINIGER** CLEANING AGENT FOR COPPER AND ALUMINIUM		

Kupfer- und Alu-Reiniger is a ready-to-use cleaning agent for substrates made of copper and aluminium.

Properties: for cleaning and passivation, removal of grease and dirt, removal of release agents and corrosion residues
Consumption: approx. 100 ml/m²
Farbton:
colourless

	Item/ pallet	Packaging unit
	780	**6 x 500 ml**

AGENT FOR SUBSTRATE PREPARATION

PRODUCT NO. 30560		ACRYL-SPACHTEL
		FILLER

Acryl-Spachtel is a white, ready-to-use filler for filling and smoothing pores, cracks, and holes in interiors and exteriors.

Properties: smooth application, excellent filling properties, can be over-coated
Gloss level: matt
Consumption: approx. 300 - 350 g/m²
Substrate: Timber, engineered woods, metals, rigid plastics

Farbton:
9110 white

Item/pallet	Packaging unit
1200	**10 x 400 g**
600	**10 x 1,3 kg**

PRODUCT NO. 30395		2K-POLYESTER-FÜLLSPACHTEL
		FILLER

2K-Polyester-Füllspachtel is a two-component filler for application on substrates in industry and for building protection.

Properties: excellent filling properties, rapid drying, fine texture
Substrate: Timber, engineered woods, metals, rigid plastics
Farbton:
white
Notes: The lid contains a tube of hardener.

Item/pallet	Packaging unit
1440	**12 x 250 g**
432	**12 x 1 kg**

CONSTRUCTION LACQUERS

Construction paints, solvent-based
Primers and undercoat lacquers

PRODUCT NO. 30360		**ALL-GRUND** ALL-PURPOSE PRIMER

All-Grund is an all-purpose primer for prime coatings and intermediate paint coats on many substrates in both interiors and exteriors.

Properties: can be painted after 3 hours, for iron, zinc, aluminium, timber, and plastics, active protection against corrosion
Gloss level: matt
Consumption: approx. 80 - 100 ml/m²
Colour shade:

6011 reseda green	8011 nut brown	9105 black
7001 silver grey	8306 oxide-red	9110 white

Notes: The colour shades 9110 white and 7001 silver grey are available in 10 l containers.
The 125 ml container is available in the colour shades 9110 white, 7001 silver grey, and 9105 black.
The 375 ml container is available in the colour shades 9110 white, 7001 silver grey, and 9105 black.

Item/pallet	Packaging unit
2400	**10 x 125 ml**
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

PRODUCT NO. 30365		**ALL-GRUND MIX** ALL-PURPOSE PRIMER

All-Grund Mix is an all-purpose tintable primer and adhesion promoter for prime coatings and intermediate paint coats on many substrates in both interiors and exteriors.

Properties: rapid drying, for iron, zinc, aluminium, timber, and plastics, active protection against corrosion
Gloss level: matt
Consumption: approx. 80 - 100 ml/m²
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:

Basis 0080	Basis 0000

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

PRODUCT NO. 30850		**ALL-GRUND SPRAY** ALL-PURPOSE PRIMER

All-Grund Spray is an all-purpose primer and adhesion promoter for many substrates.

Properties: excellent adhesion, rapid drying, active protection against corrosion
Gloss level: matt
Consumption: approx. 400 ml/m²
Colour shade:

9110 white	7001 silver grey	9105 black

Item/pallet	Packaging unit
696	**6 x 400 ml**

CONSTRUCTION LACQUERS

PRODUCT NO. 30031

ALL-DECK VORLACK
UNDERCOAT LACQUER

All-Deck Vorlack is a priming coat for high-quality finishes in interiors.

Properties: very high whiteness, excellent resistance to flow, excellent filling properties
Gloss level: silk matt
Consumption: approx. 80 - 100 ml/m²
Farbton:
9100 white
All-Color factory tinting: The product is available in pastel colour shades.

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30305

LBN-100
PRIMER FOR IRON METALS

LBN-100 is a primer on a synthetic-resin base for iron and steel substrates.

Properties: rapid drying, good adhesion, high protection against corrosion
Gloss level: matt
Consumption: approx. 60 - 80 ml/m²

Farbton:
7135 light grey

Item/pallet	Packaging unit
360	6 x 1 l
60	5 l

PRODUCT NO. 30400

2K-EPOXI-FÜLLPRIMER
EPOXY RESIN PRIMER

2K-Epoxi-Füllprimer is a two-component primer for application on many substrates in industry and for building protection.

Properties: adhesion promoter, primer, and filler in one, very high protection against corrosion, high resistance to chemicals
Consumption: approx. 60 - 300 ml/m² depends on the area of application
Farbton:
9110 white

Item/pallet	Packaging unit
264	6 x 1 l
39	5 l

PRODUCT NO. 30465

2K-ALL-GRUND
TWO-COMPONENT PU ADHESION PRIMER

2K-All-Grund is a two-component primer for application on many substrates in building protection, in timber frame construction, and in industrial construction.

Properties: adhesion promoter, primer, and filler in one, for many substrates, suitable for spraying and painting
Gloss level: matt
Consumption: approx. 60 - 350 ml/m² depends on the area of application
Farbton:
9110 white
Notes: Observe the current technical data sheet for the mixing ratio of components A and B.

Item/pallet	Packaging unit
360	6 x 1 l
60	4 l

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

CONSTRUCTION LACQUERS

Construction lacquers, solvent-based
Finishing lacquers

PRODUCT NO. **30033**	**ALL-DECK WEISSLACK SATIN** SILK GLOSS WHITE LACQUER

All-Deck Weißlack Satin is an alkyd resin lacquer with very good hiding power for high-quality finishes in both interiors and exteriors

Properties: very high whiteness, excellent hiding power, excellent flow properties
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Colour shade:
9100 white   9352 aged white
Notes: The colour shade 9352 aged white is only available in the 750 ml and 2.5 l container sizes.

Item/pallet	Packaging unit
2400	**10 x 125 ml**
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

PRODUCT NO. **30380**	**ALL-DECK BUNTLACK SATIN** SILK GLOSS COLOURED LACQUER

All-Deck Buntlack Satin is an alkyd resin lacquer with very good hiding power for high-quality finishes in both interiors and exteriors.

Properties: first-class application properties, excellent hiding power, excellent flow properties
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Colour shade:
RAL 1021 rapeseed yellow RAL 7001 silver grey   RAL 9005 jet black
RAL 3000 flame red   RAL 7016 anthracite grey RAL 9010 pure white
RAL 5010 gentian-blue   RAL 7035 light grey
RAL 6005 moss green   RAL 8011 nut brown
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0000
Basis 0030   Basis 0700

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

PRODUCT NO. **30720**	**ALL-DECK METALLIC-LACK SATIN** SILK GLOSS METALLIC LACQUER

All-Deck Metallic-Lack Satin is an alkyd resin lacquer with aluminium pigments for high-quality finishes in both interiors and exteriors.

Properties: first-class application properties, excellent flow properties, marked metallic effect
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Colour shade:
RAL 9006 white aluminium   RAL 9007 grey aluminium

All-Color factory tinting: The product is available in metallic colour shades.
All-Color tinting bases:
Basis 0080 Metallic
Notes: The base 0080 metallic is only available in 750 ml containers.

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**

CONSTRUCTION LACQUERS

PRODUCT NO.**30032**	**ALL-DECK WEISSLACK HOCHGLANZ**HIGH-GLOSS WHITE LACQUER

All-Deck Weißlack Hochglanz is an alkyd resin lacquer with very good hiding power for high-quality finishes in interiors and exteriors.

Properties: very high whiteness, excellent hiding power, excellent flow properties
Gloss level: high-gloss
Consumption: approx. 80 - 100 ml/m²
Farbton:
9100 white

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

WEISSER TITAN

PRODUCT NO.**30375**	**ALL-DECK BUNTLACK HOCHGLANZ**HIGH-GLOSS COLOURED LACQUER

All-Deck Buntlack Hochglanz is an alkyd resin lacquer with very good hiding power for high-quality finishes in both interiors and exteriors.

Properties: first-class application properties, excellent hiding power, excellent flow properties
Gloss level: high-gloss
Consumption: approx. 80 - 100 ml/m²
Colour shade:

RAL 1021 rapeseed yellow	RAL 7001 silver grey	RAL 9005 jet black
RAL 3000 flame red	RAL 7016 anthracite grey	RAL 9010 pure white
RAL 5010 gentian-blue	RAL 7035 light grey	
RAL 6005 moss green	RAL 8011 nut brown	

All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:

Basis 0080	Basis 0000
Basis 0030	Basis 0700

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

DENDRIMER TECHNOLOGIE • ALL-COLOR MIX

PRODUCT NO.**30039**	**VENTI PLUS**SILK GLOSS, ALL-PURPOSE LACQUER

Venti Plus is a one-pot system for painting timber and plastic. The product can be used for dimensionally stable structural members (windows, doors) and semi-dimensionally-stable building elements (roof soffits, window shutters).

Properties: very good filling capacity, good coverage, ventilating, isolation of wood constituents, block-resistant, high colour stability
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Substrate: Timber, hard plastics, existing lacquer coats
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:

Basis 0080	Basis 0000

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**
60	**5 l**

UV-PLUS TECHNOLOGIE • ALL-COLOR MIX

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

CONSTRUCTION LACQUERS

| PRODUCT NO. | | **SUPER-DICKSCHUTZ UNI** |
| **30048** | | PROTECTIVE LACQUER FOR METAL |

Super-Dickschutz Uni is a thick-layer lacquer with low solvent content for protection against corrosion.

Properties: excellent adhesion, high weatherability, active protection against corrosion
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Substrate: Iron, steel, non-ferrous heavy metals, load-bearing existing coatings
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0000

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

| PRODUCT NO. | | **SUPER-DICKSCHUTZ EG** |
| **30835** | | PROTECTIVE LACQUER WITH IRON MICA |

Super-Dickschutz EG is a thick-layer lacquer with low solvent content for protection against corrosion.

Properties: reliable direct adhesion, high weatherability, active protection against corrosion
Gloss level: matt
Consumption: approx. 120 - 150 ml/m²
Colour shade:
DB 701   DB 702   DB 703
All-Color factory tinting: The product is available in DB iron mica colour shades.
All-Color tinting bases:
Basis EG
Notes: The EG tint base is additionally available in 375 ml containers.

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

| PRODUCT NO. | | **HEIZKÖRPER LACK** |
| **30495** | | RADIATOR LACQUER |

Heizkörper Lack is a heat-resistant special-purpose lacquer for coating radiators and warm-water pipes.

Properties: high-gloss, high whiteness, heat resistance up to + +180 °C
Gloss level: high-gloss
Consumption: approx. 80 - 100 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

CONSTRUCTION LACQUERS

Construction lacquers, water-based
Primers and undercoat lacquers

PRODUCT NO. **30565**		**AQUAVISION ALL-GRUND** ALL-PURPOSE PRIMER

AquaVision All-Grund is a very quick-drying all-purpose primer for interiors and exteriors.

Properties: for iron, zinc, aluminium, timber, and plastics, rapid drying, mild odour
Gloss level: matt
Consumption: approx. 80 - 120 ml/m²
Colour shade:
9110 white   7001 silver grey   9105 black
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white
Notes: The 375 ml container and the 10 l container are only available in the colour shade 9110 white.

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

PRODUCT NO. **30053**		**ACRYL ALL-GRUND SPRAY** ALL-PURPOSE PRIMER

Acryl All-Grund Spray is an all-purpose primer and adhesion promoter for many substrates. The product is ideally suitable for touching up defects.

Properties: excellent flow properties, water-based technology
Consumption: approx. 350 ml/m²
Substrate: Iron, steel, galvanised steel, non-ferrous metals, rigid PVC, load-bearing existing lacquer coats

Farbton:
9110 white

Item/pallet	Packaging unit
696	**6 x 400 ml**

PRODUCT NO. **30575**		**AQUAVISION 2K-ALL-GRUND** EPOXY RESIN PRIMER

AquaVision 2K-All-Grund is a two-component adhesion promoter on an epoxy resin base for interiors and exteriors.

Properties: water-dilutable adhesion promoter, for smooth substrates, can be over-coated
Gloss level: silk gloss
Consumption: approx. 90 - 120 ml/m²
Farbton:
9110 white

Item/pallet	Packaging unit
240	**4 x 800 ml**

CONSTRUCTION LACQUERS

PRODUCT NO. **30600**	**AQUAVISION PU-VORLACK** UNDERCOAT LACQUER

AquaVision PU-Vorlack is a priming coat or intermediate lacquer coat for high-quality finishes in interiors.

Properties: excellent hiding power, good flow properties, excellent filling properties
Gloss level: matt
Consumption: approx. 80 - 100 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0000

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

Construction lacquer, water-based
Finishing lacquers

PRODUCT NO. **30046**	**AQUAVISION PU-WEISSLACK MATT** MATT WHITE LACQUER

Area of application: AquaVision PU-Weißlack Matt is a high-quality lacquer for interiors. A European Standard for Toy Safety DIN EN 71-3 report is available for the product. AquaVision PU-Weißlack Matt is a high-quality lacquer for interiors. A European Standard for Toy Safety DIN EN 71-3 report is available for the product.

Properties: excellent hiding power, high whiteness, very good flow properties
Gloss level: matt
Consumption: approx. 80 - 100 ml/m²

Farbton:
9110 white

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. **30595**	**AQUAVISION PU-WEISSLACK SATIN** SILK GLOSS WHITE LACQUER

AquaVision PU-Weißlack Satin is a high-quality lacquer for exteriors and interiors. A European Standard for Toy Safety DIN EN 71-3 report is available for the product.

Properties: excellent hiding power, high whiteness, very good flow properties
Gloss level: silk matt
Consumption: approx. 80 - 100 ml/m²

Farbton:
9110 white

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l
60	5 l

PRODUCT NO. **30770**	**AQUAVISION PU-BUNTLACK SATIN** SILK GLOSS COLOURED LACQUER

AquaVision PU-Buntlack Satin is a high-quality lacquer for interiors and exteriors. A report in accordance with DIN EN 71-3 (Safety of Toys) is available for the product.

Properties: good coverage, high colour stability, very good flow properties
Gloss level: silk matt
Consumption: approx. 80 - 100 ml/m²
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0030   Basis 0000

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l

CONSTRUCTION LACQUERS

PRODUCT NO. 30810

AQUAVISION PU-WEISSLACK HOCHGLANZ
HIGH-GLOSS WHITE LACQUER

AquaVision PU-Weißlack Hochglanz is a high-quality lacquer for interiors and exteriors. A European Standard for Toy Safety DIN EN 71-3 report is available for the product.

Properties: high whiteness, brilliant surface, very good flow properties
Gloss level: high-gloss
Consumption: approx. 80 - 100 ml/m²
Farbton:
9110 white

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30815

AQUAVISION PU-BUNTLACK HOCHGLANZ
HIGH-GLOSS COLOURED LACQUER

AquaVision PU-Buntlack Hochglanz is a high-quality lacquer for interiors and exteriors.

Properties: very good application properties, brilliant surface, very good flow properties
Gloss level: high-gloss
Consumption: approx. 80 - 100 ml/m²
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0000

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30043

AQUAVISION 2K-SEIDENMATTLACK
SILK MATT LACQUER, TWO-COMPONENT

AquaVision 2K-Seidenmattlack is a two-component finishing lacquer for especially durable coatings in interiors and exteriors. Material preparation: mix component A with component B to a ratio of 10:1 according to the weight. Stir intensively for 2 - 3 minutes. Apply the mixed material at a temperature of +20 °C within 8 hours.

Properties: low-odour, very good flow properties, scratch-resistant, resistance to hand perspiration, high impact resistance, high weatherability
Gloss level: silk matt
Consumption: approx. 100 - 120 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0000

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30044

AQUAVISION 2K-HÄRTER
HARDENER

AquaVision 2K-Härter is the component B for the SÜDWEST AquaVision 2K-Lacken (component A). Refer to the Technical Data Sheet of the respective component A for the mixing ratio (component A : component B).
AquaVision 2K-Härter is the component B for the SÜDWEST AquaVision 2K-Lacken (component A). Refer to the Technical Data Sheet of the respective component A for the mixing ratio (component A : component B).

Properties: easy to apply, colourless, isocyanate-free, low-odour

Farbton:
colourless
Notes: Mixing ratio: observe the technical data sheet.

Packaging unit
75 ml
250 ml

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

CONSTRUCTION LACQUER

PRODUCT NO. 30880		**AQUAVISION VENTI SATIN** LACQUER FOR WINDOWS		

AquaVision Venti Satin is an economical, silk gloss one-pot system for timber in exteriors.

Properties: one-pot system for wooden windows, good block resistance, with film protection
Gloss level: silk gloss
Consumption: approx. 100 - 120 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0000

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30555		**AQUAVISION HEIZKÖRPERLACK** RADIATOR LACQUER		

AquaVision Heizkörperlack is a special-purpose lacquer for coating radiators and warm water pipes.

Properties: rapid drying, high whiteness, heat resistance up to + 120 °C
Gloss level: gloss
Consumption: approx. 80 - 100 ml/m²
Farbton:
9110 white

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30940		**AQUAVISION SCHULTAFEL-LACK** SPECIAL-PURPOSE LACQUER FOR SURFACES SUITABLE FOR WRITING ON		

AquaVision Schultafel-Lack is a special-purpose lacquer for creating surfaces that can be written on with chalk or chalk markers.

Properties: excellent application, rapid drying, matt surface
Gloss level: matt
Consumption: approx. 80 - 100 ml/m²

Colour shade:
6105 green   9105 black
All-Color factory tinting: the product is available in the following RAL colour shades: RAL 2008,RAL 3011, RAL 3016, RAL 3017, RAL 4002, RAL 4006, RAL 4008, RAL 5003,RAL 5022, RAL 6026, RAL 6029, RAL 7008, RAL 7010, RAL 7024, RAL 7026,RAL 8023, RAL 8025, RAL 8019
All-Color tinting bases:
Basis 0000

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30510		**AQUA ALU-EFFECTLACK** GLOSSY METALLIC LACQUER		

Aqua Alu-Effectlack is a decorative special-purpose lacquer for high-quality, glossy surfaces with metallic effect.

Properties: rapid drying, brilliant surface, shimmer effect on the surface
Gloss level: gloss
Consumption: approx. 80 - 100 ml/m²
Farbton:
9318 brilliant silver
All-Color factory tinting: The product is available in metallic colour shades.
All-Color tinting bases:
9318 brilliant silver

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

LACQUERS AND WOOD COATINGS
CONSTRUCTION LACQUER

PRODUCT NO.**30935**		**HEIZKÖRPER SPRAY**RADIATOR LACQUER		

Heizkörper Spray is a white, silk gloss, special-purpose lacquer for coating radiators and warm water pipes.

	Item/pallet	Packaging unit
Properties: excellent hiding power, very quick drying, water-based technology **Gloss level:** silk gloss **Consumption:** approx. 350 ml/m² **Substrate:** Primed, metals, load-bearing existing coatings	696	**6 x 400 ml**

Farbton:
9110 white

Construction lacquer, water-based
Spray lacquer

PRODUCT NO.**30014**		**AQUAVISION PU-AIRLESS VORLACK**WATER-BASED AIRLESS UNDERCOAT LACQUER		

AquaVision PU-Airless Vorlack is an undercoat lacquer for the efficient coating of prepared substrates with an airless spray process.

	Item/pallet	Packaging unit
Properties: efficient application, excellent filling properties, highly suitable for sanding **Gloss level:** silk matt **Consumption:** approx. 200 - 400 ml/m² **Farbton:** 9110 white	60	**5 l**

PRODUCT NO.**30016**		**AQUAVISION PU-AIRLESS LACK SATIN**WATER-BASED AIRLESS SPRAY LACQUER		

AquaVision PU-Airless Lack Satin is a paint for the efficient coating of prepared substrates in interiors and exteriors. Apply the product undiluted using an airless spray process.

	Item/pallet	Packaging unit
Properties: efficient application on large surfaces, very good non-sag properties, excellent hiding power **Gloss level:** silk matt **Consumption:** approx. 150 - 250 ml/m² **Farbton:** 9110 white	60	**5 l**

Construction lacquers, water-based
Clear coating materials

PRODUCT NO.		**AQUAVISION PU-KLARLACK MATT**	
30047		MATT CLEAR COATING MATERIAL	

Area of application: AquaVision PU-Klarlack Matt is a high-quality lacquers for interiors. The product can be used as a transparent protective coating on many substrates. AquaVision PU-Klarlack Matt is a high-quality lacquers for interiors. The product can be used as a transparent protective coating on many substrates.

Properties: low-emission, high durability, does not yellow
Gloss level: matt
Consumption: approx. 100 - 120 ml/m²
Substrate: Timber, glass mesh, stone, concrete, lacquers, wall paints
Farbton:
colourless

Item/pallet	Packaging unit
144	**6 x 750 ml**
528	**4 x 2,5 l**

MACHINE LACQUERS

Primers and fillers

PRODUCT NO. **30395**		**2K-POLYESTER-FÜLLSPACHTEL** FILLER

2K-Polyester-Füllspachtel is a two-component filler for application on substrates in industry and for building protection.

Properties: excellent filling properties, rapid drying, fine texture
Substrate: Timber, engineered woods, metals, rigid plastics
Farbton:
white
Notes: The lid contains a tube of hardener.

Item/pallet	Packaging unit
1440	**12 x 250 g**
432	**12 x 1 kg**

PRODUCT NO. **30305**		**LBN-100** PRIMER FOR IRON METALS

LBN-100 is a primer on a synthetic-resin base for iron and steel substrates.

Properties: rapid drying, good adhesion, high protection against corrosion
Gloss level: matt
Consumption: approx. 60 - 80 ml/m²

Farbton:
7135 light grey

Item/pallet	Packaging unit
360	**6 x 1 l**
60	**5 l**

PRODUCT NO. **30400**		**2K-EPOXI-FÜLLPRIMER** EPOXY RESIN PRIMER

2K-Epoxi-Füllprimer is a two-component primer for application on many substrates in industry and for building protection.

Properties: adhesion promoter, primer, and filler in one, very high protection against corrosion, high resistance to chemicals
Consumption: approx. 60 - 300 ml/m² depends on the area of application
Farbton:
9110 white

Item/pallet	Packaging unit
264	**6 x 1 l**
39	**5 l**

PRODUCT NO. **30465**		**2K-ALL-GRUND** TWO-COMPONENT PU ADHESION PRIMER

2K-All-Grund is a two-component primer for application on many substrates in building protection, in timber frame construction, and in industrial construction.

Properties: adhesion promoter, primer, and filler in one, for many substrates, suitable for spraying and painting
Gloss level: matt
Consumption: approx. 60 - 350 ml/m² depends on the area of application
Farbton:
9110 white
Notes: Observe the current technical data sheet for the mixing ratio of components A and B.

Item/pallet	Packaging unit
360	**6 x 1 l**
60	**4 l**

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

Machine lacquers, single-component

PRODUCT NO. 30310		**LBN-300 GLÄNZEND** GLOSS LACQUERS FOR MACHINES.	

LBN-300 is a PU-reinforced, alkyd resin lacquer for high quality, hard-wearing finishes. The product is suitable for finishes on agricultural or construction machines, commercial vehicles, and industrial machines.

Properties: PU-reinforced, single-component, good resistance to oils and petrol
Gloss level: gloss
Consumption: approx. 80 - 120 ml/m²
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0000

Item/ pallet	Packaging unit
360	**6 x 1 l**
60	**5 l**

PRODUCT NO. 30315		**LBN-400 SEIDENMATT** SILK MATT LACQUERS FOR MACHINES	

LBN-400 is a PU-reinforced, alkyd resin lacquer for high quality, hard-wearing finishes. The product is suitable for finishes on agricultural or construction machines, commercial vehicles, and industrial machines.

Properties: PU-reinforced, single-component, good resistance to oils and petrol
Gloss level: silk matt
Consumption: approx. 80 - 120 ml/m²
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0000

Item/ pallet	Packaging unit
360	**6 x 1 l**
60	**5 l**

PRODUCT NO. 30410		**SCHNELLHÄRTER** DRYING ACCELERATOR FOR ALKYD RESIN LACQUER	

Schnellhärter is a colourless, reactive additive for drying acceleration and surface treatment of alkyd resin lacquer.

Properties: initial drying accelerator, through-drying improvement, elevation of mechanical resistance
Notes: added quantity: maximum 10 %

Item/ pallet	Packaging unit
1500	**6 x 250 ml**
330	**6 x 1 l**
84	**6 l**

MACHINE LACQUERS

Machine lacquers, two-component

PRODUCT NO. **30195**		**2K-ACRYL-HOCHGLANZLACK** HIGH-GLOSS LACQUER	

	2K-Acryl-Hochglanzlack is a high-quality, two-component finishing lacquer on a polyurethane base. The product is suitable for heavily used surfaces, e.g. on commercial vehicles or machines.	Packaging unit
AUSLAUF-ARTIKEL	**Properties:** rapid drying, high load-bearing capacity, high weatherability **Gloss level:** high-gloss **Consumption:** approx. 80 - 100 ml/m² **All-Color factory tinting:** The product is available in all colour shades. **Notes:** mixing ratio: observe the technical data sheet	375 ml 750 ml 1 l 2,5 l 5 l 10 l

PRODUCT NO. **30200**		**2K-ACRYL-SEIDENGLANZLACK** SILK GLOSS LACQUER	

	2K-Acryl-Seidenglanzlack is a high-quality, two-component finishing lacquer on a polyurethane base. The product is suitable for heavily used surfaces, e.g. on commercial vehicles or machines.	Packaging unit
AUSLAUF-ARTIKEL	**Properties:** rapid drying, high load-bearing capacity, high weatherability **Gloss level:** silk gloss **Consumption:** approx. 80 - 100 ml/m² **All-Color factory tinting:** The product is available in all colour shades. **Notes:** mixing ratio: observe the technical data sheet	375 ml 750 ml 1 l 2,5 l 5 l 10 l

Hardeners, thinners, and additional products

PRODUCT NO. **30034**		**2K-ACRYL-HÄRTER** HARDENER	

	2K-Acryl-Härter is the component B for the SÜDWEST 2K-Acryl-Lacken (component A).	Item/pallet	Packaging unit
	Notes: Mixing ratio: observe the technical data sheet.	1500 330	6 x 250 ml 6 x 1 l

PRODUCT NO. **30036**		**2K-ACRYL-VERDÜNNUNG** THINNERS	

	Thinner can also be used as a cleaning agent.	Item/pallet	Packaging unit
		360	6 x 1 l

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

MACHINE LACQUERS

PRODUCT NO. **30450**		**STREICHLACK-ZUSATZ FÜR 2K-ACRYL-LACK** HARDENER

Use Streichlack-Zusatz für 2K-Acryl-Lacke as a hardener for SÜDWEST 2K-Acryl-Lacke if they are to be applied with a paint brush to small surfaces.

Notes: Mixing ratio: observe the technical data sheet.

Item/pallet	Packaging unit
1500	**6 x 250 ml**

PRODUCT NO. **30460**		**STREICHLACK-ZUSATZ FÜR 2K-ALL-GRUND** HARDENER

Use Streichlack-Zusatz für 2K-All-Grund as a hardener for SÜDWEST 2K-All-Grund if the product is to be applied with a paint brush to small surfaces.

Notes: Mixing ratio: observe the technical data sheet.

Item/pallet	Packaging unit
1500	**6 x 250 ml**

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

SPECIAL-PURPOSE LACQUERS

PRODUCT NO. **30215**		**UNTERWASSER-FARBE** SPECIAL-PURPOSE PAINT FOR WATER BASINS

Area of application: Unterwasser-Farbe is a waterproof coating for mineral substrates in underwater areas. The product is used for coating new concrete substrates or for overcoating old coatings on a chlorinated rubber base.

Properties: easy to apply, does not swell, resistant to chlorinated water
Gloss level: silk gloss
Consumption: approx. 150 ml/m²
Substrate: Concrete, external renders in underwater areas, existing paint coats on a chlorinated rubber base
Colour shade:
5450 blue   6480 green   9110 white
Notes: The colour shades 6480 green and 9110 white are only available in the 2.5 l container size.

Item/pallet	Packaging unit
525	**3 x 750 ml**
140	**2 x 2,5 l**
45	**10 l**

PRODUCT NO. **30325**		**MARKIERUNGSFARBE** SPECIAL-PURPOSE PAINT FOR MARKINGS

Markierungsfarbe is a product for the coloured marking of carriageways, car parks, footpaths, and pallet positions in interiors and exteriors.

Properties: very quick drying, high load-bearing capacity
Gloss level: matt
Consumption: approx. 350 ml/m²
Substrate: Concrete, macadam covers, bitumen, and paving stones
Colour shade:
9110 white   RAL 3020 traffic red   9105 black
RAL 5017 traffic blue   RAL 1023 traffic yellow
All-Color factory tinting: The product is available in all intense RAL colour shades.
All-Color tinting bases:
Basis 0000
Notes: The colour shade RAL 1023 traffic yellow is an approximate colour shade and is only available in the 2.5 litre container size.

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

PRODUCT NO. **30240**		**METALLIC-LACK HAMMERSCHLAGEFFEKT** SPECIAL-PURPOSE PAINT WITH HAMMER IMPACT

Metallic-Lack mit Hammerschlageffekt is a special-purpose lacquer for the protection and decorative design of substrates, e.g. machine parts or railings.

Properties: decorative appearance, good weatherability, corrosion-inhibiting properties
Gloss level: gloss
Consumption: approx. 120 - 140 ml/m²
Farbton:
0013 light grey
All-Color factory tinting: the product is available in the following colour shades: 0014 medium grey, 0015 dark grey, 0016 blue, 0017 green
All-Color tinting bases:
0013 light grey

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**

SPECIAL-PURPOSE LACQUERS

PRODUCT NO. 30520

ZINK-AUSBESSERUNGSFARBE
SPECIAL-PURPOSE LACQUER FOR ZINC SUBSTRATES

Use Zink-Ausbesserungsfarbe to touch-up damaged spots on galvanised metals.

Properties: very good adhesion to iron and zinc, colour shade resembles a zinc appearance, high weatherability
Gloss level: matt
Consumption: approx. 120 - 150 ml/m²
Substrate: Galvanised steel parts, welded joints, zinc dust paints
Farbton:
7387 grey, resembles zinc

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml

PRODUCT NO. 30525

BÖLAZINC
PRIMER ON A ZINC DUST BASE

Bölazinc is a coating for producing a zinc surface on iron or steel to prevent underlying rust and spreading of corrosion from damage.

Properties: zinc appearance, high weatherability, high protection against corrosion
Gloss level: matt
Consumption: approx. 90 - 120 ml/m²
Farbton:
7387 grey

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. 30225

ELOXIER-EFFEKT-SPRAY
GLOSSY METALLIC LACQUER

Eloxier-Effekt-Spray is an acrylic lacquer to touch-up anodised surfaces, e.g. windows.

Properties: rapid drying, high weatherability, marked metallic effect
Gloss level: silk gloss
Consumption: approx. 250 ml/m²
Substrate: Timber, existing paint coats, iron, and NF-metals
Colour shade:
8640 black brown   9315 aluminium

Item/pallet	Packaging unit
1044	6 x 400 ml

PRODUCT NO. 30220

METALL-KLARLACK
GLOSS CLEAR COATING MATERIAL

Metall-Klarlack is a transparent protective lacquer for non-ferrous heavy metals and other substrates, e.g. timber.

Properties: oxidation protection for non-ferrous metals, rapid drying, good adhesion
Gloss level: gloss
Consumption: approx. 250 ml/m²
Substrate: Aluminium, copper, brass, chrome, tin, zinc, silver, bronze, wood

Item/pallet	Packaging unit
1044	6 x 400 ml

| PRODUCT NO. **30220** | | **METALL-KLARLACK SEIDENMATT**
SILK MATT CLEAR COATING MATERIAL |

Metall-Klarlack is a transparent protective lacquer for non-ferrous heavy metals and other substrates, e.g. timber.

Properties: oxidation protection for non-ferrous metals, rapid drying, good adhesion
Gloss level: silk matt
Consumption: approx. 250 ml/m²
Substrate: Aluminium, copper, brass, chrome, tin, zinc, silver, bronze, wood

Item/pallet	Packaging unit
1044	**6 x 400 ml**

WOOD COATINGS

Primers and preliminary materials

PRODUCT NO. **30915**	**UV-STOPP** TIMBER PRIMING

UV-Stopp is a primer for untreated, light-coloured timber in interiors. The product protects timber against UV radiation and thus preserves the natural colour shade of timber over long periods of time.

Properties: protection of the timber from yellowing and darkening, no film formation, with a report on effectivity
Gloss level: matt
Consumption: approx. 80 - 150 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
400	**12 x 1 l**
60	**5 l**

PRODUCT NO. **30290**	**HOLZ-ISOLIER-GRUND** ISOLATING PRIMER FOR TIMBER

Holz-Isolier-Grund is a white pigmented, isolating primer for new and old timber in exteriors areas.

Properties: isolates wood constituents, for brightening, levels old timber
Gloss level: silk matt
Consumption: 100 - 120 ml/m²
Colour shade:
9110 white   8908 pine   8960 alder
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

PRODUCT NO. **30885**	**AQUAVISION ISOLIER-GRUND** ISOLATING PRIMER FOR TIMBER

AquaVision Isolier-Grund is a white pigmented, insulating primer on a cationic binding agent base for timber and engineered wood. The product can also be used as a single-pot system in interiors.

Properties: rapid drying, very good barrier effect, cationic binding agent base
Gloss level: matt
Consumption: approx. 90 - 110 ml/m²

Farbton:
9110 white

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

PRODUCT NO. **30019**	**HOLZ-IMPRÄGNIER-GRUND LH** READY-TO-USE WOOD PRESERVATIVE

Holz-Imprägnier-Grund LH is a ready-to-use, colourless, solvent-containing wood impregnation to protect wood in exteriors and ward off fungi that discolour and destroy wood.

Properties: ideal for softwoods, protection against blue stain, rot, and mould. Proven effectiveness!
Gloss level: matt
Consumption: 135 - 140 ml/m²
Farbton:
colourless
Warning: The product contains biocides. Use biocides with care. Always read the label and product information before use.

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**
60	**5 l**
39	**10 l**

WOOD COATINGS

PRODUCT NO.		AQUAVISION HOLZ-IMPRÄGNIER-GRUND WV
30018		READY-TO-USE WOOD PRESERVATIVE

AquaVision Holz-Imprägnier-Grund WV is a ready-to-use, colourless, water-based wood impregnation primer to protect wood in exteriors and ward off blue stain and mould infestation.

Properties: ideal for softwoods, tested effectivity, preventative protection against blue stain and mould infestation
Gloss level: matt
Consumption: approx. 120 - 140 ml/m²
Farbton:
colourless
Warning: The product contains biocides. Use biocides with care. Always read the label and product information before use.

Item/pallet	Packaging unit
660	**6 x 375 ml**
528	**6 x 750 ml**
144	**4 x 2,5 l**

Wood stains

PRODUCT NO.		IMPRÄGNIER-LASUR
30275		THIN-LAYER WOOD STAIN

Imprägnier-Lasur is a thin-layer wood stain for non-dimensionally-stable timber elements in exteriors.

Properties: good depth of penetration, open-pored, with film protection
Gloss level: silk matt
Consumption: 50 - 80 ml/m²
Colour shade:

8919 teak	8924 walnut	8931 ash
8921 pine	8925 oak	9551 ebony
8922 mahogany	8927 old pine	0901 colourless
8923 palisander	8930 light oak	

All-Color factory tinting: The product is available in wood shades and chromatic colours.
All-Color tinting bases:
0901 colourless
Notes: The tinting base 0901 is only available in the following container sizes: 6 x 750 ml, 4 x 2.5 l, 5 l, 10 l.

Item/pallet	Packaging unit
144	**4 x 2,5 l**

PRODUCT NO.		HYBRID HOLZ-LASUR
30004		THIN-LAYER WOOD STAIN

Area of application: Hybrid Holz-Lasur is a low film-forming, all-purpose wood stain for non-dimensionally-stable and semi-dimensionally-stable timber elements in interior and exterior areas. Hybrid Holz-Lasur is a low film-forming, all-purpose wood stain for non-dimensionally-stable and semi-dimensionally-stable timber elements in interiors and exteriors.

Properties: good depth of penetration, open-pored, wood texture accentuation
Gloss level: silk matt
Consumption: approx. 60 - 80 ml/m²
Colour shade:

8919 teak	8924 walnut	8931 ash
8921 pine	8925 oak	9551 ebony
8922 mahogany	8927 old pine	0901 colourless
8923 palisander	8930 light oak	

All-Color factory tinting: The product is available in wood shades and chromatic colours.
All-Color tinting bases:
0901 colourless

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

WOOD COATINGS

| PRODUCT NO. **30280** | | **FLÄCHEN-LASUR** MEDIUM-LAYERED WOOD STAIN | |

Flächen-Lasur is an all-purpose wood stain with high non-volatile content for all timber elements in both interiors and exteriors.

Properties: non-drip, high weatherability, very good UV protection
Gloss level: silk gloss
Consumption: 80 - 100 ml/m²
Colour shade:

8919 teak	8924 walnut	8931 ash
8921 pine	8925 oak	9551 ebony
8922 mahogany	8927 old pine	9110 white
8923 palisander	8930 light oak	0901 colourless

All-Color factory tinting: The product is available in wood shades and chromatic colours.
All-Color tinting bases:
0901 colourless   9110 white

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l
60	5 l
39	10 l

| PRODUCT NO. **30845** | | **PATINA-LASUR** THIN-LAYER WOOD STAIN | |

Patina-Lasur is a thin-layer wood stain with pearl lustre pigments for non-dimensionally-stable timber in exterior areas.

Properties: high UV protection due to reflecting pigments, good depth of penetration, attractive old wood character
Gloss level: silk gloss
Consumption: 50 - 80 ml/m²
Colour shade:

PAT 0700 silver	PAT 0200 copper	PAT 0100 gold
PAT 0600 emerald	PAT 0701 titanium	PAT 0800 driftwood

All-Color tinting bases:
Basis 9320 Patina

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l
60	5 l

| PRODUCT NO. **30250** | | **AQUAVISION FLÄCHEN-LASUR** MEDIUM-LAYERED WOOD STAIN | |

AquaVision Flächen-Lasur is an all-purpose, open-pored wood stain for decorative wood coatings in interiors and exteriors.

Properties: non-drip, high weatherability, very good UV protection
Gloss level: silk matt
Consumption: 60 - 100 ml/m²
Colour shade:

0901 colourless	8923 palisander	8930 light oak
8919 teak	8924 walnut	8931 ash
8921 pine	8925 oak	9551 ebony
8922 mahogany	8927 old pine	9118 isolating white

All-Color factory tinting: The product is available in wood shades and chromatic colours.
All-Color tinting bases:
0901 colourless   9118 isolating white

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l
60	5 l

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

WOOD COATINGS

| PRODUCT NO. **30955** | | **WACHS-LASUR** MEDIUM-LAYERED WOOD STAIN | |

Wachs-Lasur is a decorative wood stain for the protection of timber in interiors.

Properties: water-based, emphasising the natural wood appearance, matt surface
Gloss level: matt
Consumption: approx. 60 - 80 ml/m²
Colour shade:

| 0901 colourless | 1991 chalk white | 1995 brilliant white |

All-Color factory tinting: The product is available in wood shades and chromatic colours.
All-Color tinting bases:
0901 colourless

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

Oils

| PRODUCT NO. **30009** | | **HOLZ-ÖL** OIL FOR WOODEN TERRACES AND FURNITURE | |

Holz-Öl is a natural oil for the protection and care of non-dimensionally-stable timbers, e.g. wooden terraces, benches, and garden furniture in exteriors.

Properties: good penetration capacity, does not spall, emphasises the wooden character
Gloss level: silk matt
Consumption: 50 - 80 ml/m²
Colour shade:

| 0001 natural | 8940 larch | 8942 Bangkirai |
| 8919 teak | 8941 Douglas fir | |

All-Color factory tinting: the product is available in the following RAL colour shades: 7768 silvergrey, 7051 natural grey, 7040 slate grey, 7151 vintage grey, 7158 sandgrey
All-Color tinting bases:
0001 natural

Item/pallet	Packaging unit
360	**6 x 1 l**
144	**4 x 2,5 l**
60	**5 l**

| PRODUCT NO. **30011** | | **FASSADEN-ÖL** OIL FOR VERTICAL WOODEN SURFACES | |

Fassaden-Öl is a high-solid natural oil for the protection and care of dimensionally stable and semi-dimensionally-stable timbers in exteriors.

Properties: good penetration capacity, very high UV-resistance due to transparent iron oxides, with film protection against algae and fungal attack
Gloss level: silk matt
Consumption: 100 - 120 ml/m²
Colour shade:

| 0001 natural | 8940 larch | 8942 Bangkirai |
| 8919 teak | 8941 Douglas fir | |

All-Color factory tinting: the product is available in the following RAL colour shades: 7768 silvergrey, 7051 natural grey, 7040 slate grey, 7151 vintage grey, 7158 sandgrey
All-Color tinting bases:
0001 natural

Item/pallet	Packaging unit
360	**6 x 1 l**
144	**4 x 2,5 l**
60	**5 l**

LACQUERS AND WOOD COATINGS
WOOD COATINGS

PRODUCT NO. **30021**		**AQUAVISION HOLZ-ÖL** ECO-FRIENDLY WOOD OIL		

AquaVision Holz-Öl is a water-in-oil emulsion for the protection and care of timbers in interiors and exteriors.

Properties: good penetration capacity, does not spall, emphasises the wooden character
Gloss level: matt
Consumption: 80 - 100 ml/m²
Colour shade:

0901 colourless	8919 teak	8941 Douglas fir
0001 natural	8940 larch	8942 Bangkirai

All-Color factory tinting: the product is available in the following RAL colour shades: 7768 silvergrey, 7051 natural grey, 7040 slate grey, 7151 vintage grey, 7158 sandgrey
All-Color tinting bases:
0901 colourless

Item/pallet	Packaging unit
660	6 x 375 ml
360	6 x 1 l
144	4 x 2,5 l
60	5 l

Clear coating materials

PRODUCT NO. **30920**		**PALADUR® HOCHGLÄNZEND** HIGH-GLOSS CLEAR COATING MATERIAL		

Paladur® is a clear coating material for colourless finishes on timber in interiors. The product can also be used as a transparent sealing coat for varnished or glazed surfaces in interiors and exteriors.

Properties: brilliant surface, good level of mechanical resistance, PU-reinforced
Gloss level: high-gloss
Consumption: 80 - 100 ml/m²

Farbton:
colourless

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. **30925**		**PALADUR® SEIDENMATT** SILK MATT CLEAR COATING MATERIAL		

Paladur® is a clear coating material for colourless finishes on timber in interiors. The product can also be used as a transparent sealing coat for varnished or glazed surfaces in weather-protected, exterior areas.

Properties: surface of a high visual quality, good level of mechanical resistance, PU-reinforced
Gloss level: silk matt
Consumption: 80 - 100 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l

WOOD COATINGS

PRODUCT NO. **30990**		**AQUAVISION HOLZ-SIEGEL GLÄNZEND** GLOSS CLEAR COATING MATERIAL		

AquaVision Holz-Siegel is a clear coating material as a sealer for surfaces in interiors. Use the product directly on timber or as a colourless protective coating on already coated substrates, e.g. wall areas.

Properties: low-emission, high durability, does not yellow
Gloss level: gloss
Consumption: 80 - 100 ml/m²
Farbton:
0901 colourless

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

PRODUCT NO. **30985**		**AQUAVISION HOLZ-SIEGEL SATIN** CLEAR SILK GLOSS VARNISH		

AquaVision Holz-Siegel is a clear coating material as a sealer for surfaces in interiors. Use the product directly on timber or as a colourless protective coating on already coated substrates, e.g. wall areas.

Properties: low-emission, high durability, does not yellow
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Farbton:
0901 colourless

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l
39	10 l

Finishing coats

PRODUCT NO. **30930**		**AQUAVISION HOLZFARBE** SILK GLOSS WOOD PRESERVATIVE	

AquaVision Holzfarbe is a covering wood preservative for exteriors.

Properties: high weatherability, wood texture preservation, with film protection against algae and fungal attack
Gloss level: silk gloss
Consumption: 100 - 120 ml/m²
Farbton:
9114 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080　　　　　　Basis 0000

Item/pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l
60	5 l
39	10 l

PRODUCT NO. **30880**		**AQUAVISION VENTI SATIN** LACQUER FOR WINDOWS	

AquaVision Venti Satin is an economical, silk gloss one-pot system for timber in exteriors.

Properties: one-pot system for wooden windows, good block resistance, with film protection
Gloss level: silk gloss
Consumption: approx. 100 - 120 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080　　　　　　Basis 0000

Item/pallet	Packaging unit
528	6 x 750 ml
144	4 x 2,5 l

WOOD COATINGS

PRODUCT NO. **30039**		**VENTI PLUS** SILK GLOSS, ALL-PURPOSE LACQUER

Venti Plus is a one-pot system for painting timber and plastic. The product can be used for dimensionally stable structural members (windows, doors) and semi-dimensionally-stable building elements (roof soffits, window shutters).

Properties: very good filling capacity, good coverage, ventilating, isolation of wood constituents, block-resistant, high colour stability
Gloss level: silk gloss
Consumption: approx. 80 - 100 ml/m²
Substrate: Timber, hard plastics, existing paint coats
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
Basis 0080   Basis 0000

Item/ pallet	Packaging unit
660	6 x 375 ml
528	6 x 750 ml
144	4 x 2,5 l
60	5 l

PRODUCT NO. **30017**		**DRYTEC® HOLZPROTECT** BIONIC WEATHER PROTECTION PAINT FOR WOODEN SURFACES

Drytec® HolzProtect is a covering weather protection paint with bionic effect for timber and engineered woods in exteriors.

Properties: perfect protection for wooden surfaces, rapid drying after rain and dew formation, very good weatherability
Gloss level: matt
Consumption: approx. 120 - 150 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/ pallet	Packaging unit
360	6 x 750 ml
72	2,5 l
36	10 l

PAINTS, PLASTERS, RENDERS, AND FILLERS

PAINTS, PLASTERS/ RENDERS, AND FILLERS

PRIMERS AND ADDITIONAL PRODUCTS

FILLERS
– Fillers, powder
– Fillers, ready to use

PLASTERS

INTERIOR PAINTS
– Emulsion paints
– Wet-scrub resistance class 1
– Wet-scrub resistance class 2
– Wet-scrub resistance class 3
– Silicate paints
– Acrylic latex paints
– Special paints

FACADE PAINTS
– Bionic paints
– Silicone-resin emulsion paints
– Emulsion paints
– Silicate paints

PRIMERS AND ADDITIONAL PRODUCTS

PRODUCT NO. **30010**		**HYDROGRUND** HYDROPHOBIC FACADE PRIMER

HydroGrund is a silicone-modified, ready-to-use, deep-acting primer. Use the product for regulating absorption capacity and consolidating chalking coatings or crumbling plasters.

Properties: colourless, ready-to-use, consolidating, solvent-free, good depth of penetration, absorbency-regulating, hydrophobic
Consumption: approx. 100 - 400 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
90	**5 l**
60	**10 l**

PRODUCT NO. **30012**		**THIXGRUND** GEL PRIMER

ThixGrund is an all-purpose primer with gel technology, tested for harmful substances, for interiors and exteriors.

Properties: absorbency-regulating, surface-consolidating, adhesion-promoting, minimal drip tendency due to innovate gel technology, high penetration capacity, colourless, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte)
Consumption: approx. 100 - 140 ml/m²

Farbton:
colourless

Item/pallet	Packaging unit
60	**5 l**
36	**10 l**

PRODUCT NO. **30080**		**INNENGRUND** WATER-BASED PRIMER FOR INTERIORS

InnenGrund is an all-purpose primer, tested for harmful substances, for consolidating existing coatings in interiors.

Properties: absorbency-regulating, surface-consolidating, adhesion-promoting, good depth of penetration, colourless, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoff-pruefung-bauprodukte)
Consumption: approx. 100 - 400 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
90	**5 l**
60	**10 l**

PRODUCT NO. **30005**		**FIXATIV** PURE MINERAL PRIMER

Fixativ is a pure mineral primer and thinner. The product is suitable for pre-fixing strongly absorbent, mineral substrates.

Properties: highly substrate-consolidating, water-dilutable, good depth of penetration, absorbency-regulating, transparent
Consumption: approx. 150 - 600 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
90	**5 l**
60	**10 l**

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

PRIMERS AND ADDITIONAL PRODUCTS

PRODUCT NO. **30230**		**TIEFENGRUND LH** SOLVENT-CONTAINING PRIMER

TiefenGrund LH is a deep-acting, solvent-containing primer for consolidating chalking coatings or crumbling renders.

Properties: free from aromatic compounds, solvent-containing, high penetration capacity, consolidating on the surface and in depth, saponification-resistant, binding of water-soluble substances, non-swellable
Consumption: approx. 200 - 600 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
50	**12 l**

PRODUCT NO. **30015**		**FUNGAN®** DISINFECTANT SOLUTION

Fungan® is a biocide-containing, water-based, active ingredient solution for the treatment of algae attack, fungal attack, or mould infestation.

Properties: highly effective against algae and fungi, water-repellent, disinfectant, high effectivity, transparent, ready-to-use
Consumption: approx. 150 - 300 ml/m²
Farbton:
colourless
Warning: The product contains biocides. Use biocides with care. Always read the label and product information before use.

Item/pallet	Packaging unit
90	**5 l**
60	**10 l**

PRODUCT NO. **30755**		**GRUNDIERFARBE** PIGMENTED PRIME COATING

GrundierFarbe is a solvent-free and plasticiser-free paint coat for firm, smooth, weak, or non-absorbent substrates in interiors and exteriors. Use the product only in interiors on existing paint coats, gypsum construction boards, or smooth concrete.

Properties: adhesion-promoting, absorbency-regulating, extended open time for the subsequent coating, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffprue-fung-bauprodukte)
Gloss level: matt
Consumption: approx. 150 - 200 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

PRIMERS AND ADDITIONAL PRODUCTS

| PRODUCT NO.
30030 | | **RISSGRUND 1 FÜR 3**
CRACK-FILLING PRIMER ON A SILICATE BASE | |
|---|---|---|---|

RissGrund 1 für 3 is a levelling, crack-filling, and adhesion-promoting primer on a silicate emulsion base. The product is also suitable for use as a brush-on plaster in interiors.

Properties: bonding agent for the following paint coats, sealing of hairline cracks and mesh cracks, structure levelling, filling of cracks, ideal substrate for mineral glazing techniques, excellent adhesion, water vapour diffusion: sd < 0.1 m, undiluted application
Consumption: approx. 400 - 600 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

| PRODUCT NO.
30035 | | **RISSGRUND FASERARMIERT**
FIBRE-REINFORCED PRIMER ON A SILICATE BASE | |
|---|---|---|---|

RissGrund faserarmiert is a fibre-reinforced, crack-filling, and adhesion-promoting primer on a silicate emulsion base.

Properties: bonding agent for the following paint coats, sealing of hairline cracks and mesh cracks, structure levelling, filling of cracks, fibre-reinforced, excellent adhesion, water vapour diffusion: sd < 0.1 m, undiluted application
Consumption: approx. 600 - 800 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

| PRODUCT NO.
30690 | | **ISOLIERSPRAY**
SOLVENT-CONTAINING ISOLATING SPRAY | |
|---|---|---|---|

IsolierSpray is a solvent-containing spray for quick and effective isolation of water, nicotine, soot, grease, and oil stains. IsolierSpray is a solvent-containing spray for quick and effective isolation of water stains, nicotine stains, soot stains, grease stains, and oil stains.

Properties: good hiding power, high whiteness, very quick drying, excellent insulating effect, no yellowing, free from aromatic compounds, suitable for polystyrene
Gloss level: dead-matt
Consumption: approx. 60 - 80 ml/m²
Farbton:
9110 white

Item/pallet	Packaging unit
696	**6 x 400 ml**

FILLERS

Fillers, powder form

PRODUCT NO. **30700**		**PROFI-GF SPACHTEL** FILLER FOR FILLING AND SMOOTHING

Profi-GF Spachtel is a highly modified gypsum filler in powder-form for interiors.

Properties: over-coatable wet-on-wet, long open time: approx. 60 minutes, excellent application
Consumption: approx. 1,00 kg/m² per mm layer thickness
Farbton:
white
Notes: surface quality: Q1-Q4 in accordance with DIN 18180

Item/pallet	Packaging unit
140	**5 kg**
48	**15 kg**

PRODUCT NO. **30710**		**RAPID SPACHTEL** CEMENT FILLER

Rapid Spachtel is a highly modified cement filler in powder-form for fast overcoating of wall areas and ceiling areas in interiors.

Properties: rapid drying, sanding at 4 mm layer thickness possible after 3 hours, excellent adhesion on difficult substrates, e.g. tiles, glass, and gloss substrates, highly suitable for sanding, layer thickness up to 50 mm possible in one application cycle, suitable for rooms exposed to moisture
Consumption: approx. 1,00 kg/m² per mm layer thickness
Farbton:
white
Notes: surface quality: Q1-Q4 in accordance with DIN 18180

Item/pallet	Packaging unit
140	**5 kg**
42	**15 kg**

Fillers, ready to use

PRODUCT NO. **30106**		**AIRLESS FEINSPACHTEL** ORGANIC SPRAY FILLER

Area of application: Airless FeinSpachtel is an extremely fine organic interior filler with ideal properties for applying to walls and ceilings. Suitable for full-faced, efficient application on almost every substrate.

Properties: Oeko-Tex® standard 100 (class 3)
Consumption: approx. 1,7 kg/m²

Item/pallet	Packaging unit
33	**25 kg**

PRODUCT NO. **30057**		**BIO-INNENSPACHTEL** MINERAL INTERIOR FILLER

Area of application: Bio-InnenSpachtel is a preservative-free, mineral interior filler with ideal properties for applying to walls and ceilings. Bio-InnenSpachtel is a preservative-free, mineral interior filler with ideal properties for applying to wall areas and ceiling areas.

Consumption: approx. 1,7 kg/m² per mm layer thickness
Density: 1,7 g/cm³
Substrate: Organic and mineral substrates
Farbton:
natural white
Notes: sanded surfaces appear to have a lighter colour shade

Item/pallet	Packaging unit
33	**25 kg**

FILLERS

PRODUCT NO.		**BAGAR AIRLISS G**		
75011		ORGANIC SPRAY FILLER		

		Item/pallet	Packaging unit
With good application properties, suitable for full-faced, efficient application on a wide range of substrates.			
Properties: low-emission, solvent-free, plasticiser-free, free from substances that contribute to 'black dust' on walls		40	**25 kg**
Consumption: approx. 1,7 kg/m² per mm layer thickness			
Farbton: natural white			
Notes: sanded surfaces appear to have a lighter colour shade			

PRODUCT NO. 30061

BIO-STREICHPUTZ
BRUSH-ON PLASTER ON A SILICATE DISPERSION BASE

Area of application: Bio-StreichPutz is a preservative-free dispersion silicate brush-on plaster, tested for harmful substances, for high quality design surfaces in interiors. Bio-StreichPutz is a preservative-free dispersion silicate brush-on plaster, tested for harmful substances, for high quality design surfaces in interiors.

Properties: classic textured pattern, very high whiteness, excellent application, Bionic-inhibiting, highest possible share of renewable and resource-saving raw materials, natureplus® quality seal meets the strictest environmental and health requirements
Consumption: approx. 200 - 400 g/m²
Density: 1,4 - 1,6 g/cm³
Farbton:
natural white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
natural white

Item/pallet	Packaging unit
60	**8 kg**
24	**25 kg**

PRODUCT NO. 3002630027

BIO-INNENPUTZ
PLASTER ON A SILICATE DISPERSION BASE

Bio-InnenPutz is a preservative-free plaster on a silicate dispersion basis, tested for harmful substances, for the high-quality design of surfaces in interiors.

Properties: classic textured pattern, very high whiteness, easy to apply, Bionic-inhibiting, highest possible share of renewable and resource-saving raw materials, natureplus® quality seal meets the strictest environmental and health requirements
Consumption: approx. 2,00 - 2,90 kg/m²
Grainings:
stippled render texture: 1.0 mm, 1.5 mm, 2.0 mm
free-style textured render
Farbton:
9110 natural white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 natural white

Item/pallet	Packaging unit
24	**25 kg**

PRODUCT NO. 30028

BIO-DEKORPUTZ
SPATTERDASH ON A SILICATE DISPERSION BASE

Area of application: Bio-DekorPutz is a preservative-free spray render on a silicate dispersion basis, tested for harmful substances, for the high-quality design of surfaces in interiors. Bio-DekorPutz is a preservative-free spray render on a silicate dispersion basis, tested for harmful substances, for the high-quality design of surfaces in interiors.

Properties: classic spray pattern, very high whiteness, excellent application, easy to apply, Bionic-inhibiting, highest possible share of renewable and re-source-saving raw materials, natureplus® quality seal meets the strictest environ-mental and health requirements
Consumption: approx. 0,80 - 1,20 kg/m²
Farbton:
9110 natural white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 natural white

Item/pallet	Packaging unit
24	**25 kg**

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

INTERIOR PAINTS

Emulsion paints
Wet-scrub resistance class 1

PRODUCT NO. **30730**		**DEKOSTAR** SINGLE-COAT EMULSION PAINT IN PREMIUM QUALITY	NASS-ABRIEB-KLASSE **1**	DECK-KRAFT-KLASSE **1**	TÜV SÜD	ALL-COLOR MIX

DekoStar is a dead-matt, single-coat emulsion paint, tested for harmful substances, with very high hiding power. The product is abrasion-resistant and is suitable for wall areas in interiors subject to high levels of stress.

Properties: very high hiding power, high whiteness, very good touch-up capacity, good resistance to surface disinfectants, can be used in food processing companies, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 1, contrast ratio: class 1 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 ml/m²

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Emulsion paints
Wet-scrub resistance class 2

PRODUCT NO. **30112**		**PROFI XXL** SINGLE-COAT EMULSION PAINT	DESINFEKTIONSMITTEL BESTÄNDIG	NASS-ABRIEB-KLASSE **2**	DECK-KRAFT-KLASSE **1**	TÜV SÜD	ALL-COLOR MIX

Area of application: Profi XXL is a preservative-free, dead-matt, single-coat emulsion paint with very high hiding power, tested for harmful substances. The product is abrasion-resistant and is suitable for wall areas in interiors subject to high levels of stress.

Properties: very high hiding power, high whiteness, very smooth application, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 2, contrast ratio: class 1 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 - 170 ml/m²

Item/pallet	Packaging unit
120	**1 l**
72	**2,5 l**
60	**5 l**
36	**10 l**
32	**12,5 l**
24	**15 l**
12	**30 l**
3	**120 l**

Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white
Notes: the 30 l and 120 l container sizes are only available in the colour shade 9110 white

INTERIOR PAINTS

PRODUCT NO.
30735

SILCOTOPIN
INTERIOR SILICONE PAINT

SilcoTopIn is a dead-matt, single-coat paint on a silicone resin base, tested for harmful substances. The product is abrasion-resistant and is suitable for interior wall and ceiling areas subject to high levels of stress and sensitive to glancing light.

Properties: very high hiding power, very high whiteness, very good touch-up capacity, not affected by glancing light, long open time, good resistance to surface disinfectants, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 2, contrast ratio: class 1 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	5 l
32	12,5 l

Emulsion paints
Wet-scrub resistance class 3

PRODUCT NO.
30013

EUROCLASSIC
SINGLE-COAT EMULSION PAINT

EuroClassic is a dead-matt, emulsion paint, tested for harmful substances. The product is washable and suitable for interior wall areas subject to normal levels of stress.

Properties: excellent hiding power, high whiteness, good touch-up capacity, good application properties, solvent- and plasticiser-free, low-emission, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 3, contrast ratio: class 1 for 6.5 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: 150 ml/m²
Colour shade:
9110 white   9377 aged white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000
Notes: The colour shade 9377 aged white is only available in the 12.5 l container size.
The 10 l container size is only available in the colour shade 9110 white.

Item/pallet	Packaging unit
360	1 l
72	2,5 l
60	5 l
36	10 l
32	12,5 l

INTERIOR PAINTS

| PRODUCT NO. **30056** | | **DIN WEISS**
INTERIOR EMULSION PAINT | NASS-ABRIEB-KLASSE **3** | DECK-KRAFT-KLASSE **2** | TÜV SÜD | ALL-COLOR MIX |

DIN Weiss is a preservative-free, dead-matt emulsion paint with a good price-performance ratio that has been tested for harmful substances. The product is washable and suitable for interior wall areas subject to normal levels of stress.

Properties: good hiding power, good whiteness, good touch-up capacity, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ′black dust′ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 3, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 150 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white
Notes: the 30 l and 120 l container sizes are only available in the colour shade 9110 white

Item/ pallet	Packaging unit
32	**12,5 l**
24	**15 l**
12	**30 l**
3	**120 l**

Silicate paints

| PRODUCT NO. **30049** | | **BIO-INNENSILIKAT**
SINGLE-COAT SILICATE PAINT | KONSERVIERUNGSMITTELFREI | natureplus | NASS-ABRIEB-KLASSE **1** | DECK-KRAFT-KLASSE **1** | TÜV SÜD | ALL-COLOR MIX |

Area of application: Bio-InnenSilikat is a preservative-free, dead-matt, one-coat silicate paint, tested for harmful substances. The product is abrasion-resistant and is suitable for ceiling surfaces and wall areas in interiors subject to high levels of stress. Bio-InnenSilikat is a preservative-free, dead-matt, one-coat silicate paint, tested for harmful substances. The product is abrasion-resistant and is suitable for wall areas and ceiling surfaces in interiors subject to high levels of stress.

Properties: very high hiding power, high whiteness, excellent application, mould-inhibiting, natureplus® quality seal meets the strictest environmental and health requirements, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ′black dust′ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), silicate paint in accordance with DIN 18363 2.4.1 with a low organic component < 5 %, good resistance to surface disinfectants, wet-scrub resistance class: 1, contrast ratio: class 1 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000
Notes: The 10 l container size is only available in the colour shade 9110 white.

Item/ pallet	Packaging unit
72	**2,5 l**
60	**5 l**
36	**10 l**
32	**12,5 l**

INTERIOR PAINTS

PRODUCT NO. **30945**	**SILIKATTOPIN** INTERIOR SILICATE PAINT		NASS-ABRIEB-KLASSE **2**	DECK-KRAFT-KLASSE **2**	TÜV SÜD	ALL-COLOR MIX

SilikatTopIn is a preservative-free, dead-matt, silicate paint, tested for harmful substances, with high hiding power. The product is abrasion-resistant and is suitable for wall areas and ceiling areas in interiors subject to high levels of stress and sensitive to glancing light.

Properties: very good touch-up capacity, excellent hiding power, excellent application, mould-inhibiting, not affected by glancing light, natureplus® quality seal meets the strictest environmental and health requirements, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), silicate paint in accordance with DIN 18363 2.4.1 with a low organic component < 5 %, good resistance to surface disinfectants, wet-scrub resistance class: 2, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine

Gloss level: dead-matt

Consumption: approx. 140 ml/m²

Farbton:
9110 white

All-Color factory tinting: The product is available in pastel colour shades.

All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

Acrylic latex paints

PRODUCT NO. **30100**	**LATEX HG** HIGH GLOSS PREMIUM EMULSION PAINT		NASS-ABRIEB-KLASSE **1**	DECK-KRAFT-KLASSE **2**	TÜV SÜD	ALL-COLOR MIX

Latex HG is a high-quality, high gloss emulsion paint. The product is abrasion-resistant and is suitable for wall areas in interiors subject to high levels of stress.

Properties: excellent hiding power, high whiteness, texture-retaining, good resistance to surface disinfectants, can be used in food processing companies, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 1, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine

Gloss level: gloss

Consumption: approx. 130 ml/m²

Farbton:
9110 white

All-Color factory tinting: The product is available in pastel colour shades.

All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

PRODUCT NO. 30150

LATEX SG
SILK GLOSS PREMIUM EMULSION PAINT

Area of application: Latex SG is a high-quality, silk gloss emulsion paint. The product is abrasion-resistant and is suitable for wall areas and ceiling surfaces in interiors subject to high levels of stress. Latex SG is a high-quality, silk gloss emulsion paint. The product is abrasion-resistant and is suitable for wall areas and ceiling surfaces in interiors subject to high levels of stress.

Properties: excellent hiding power, high whiteness, texture-retaining, good resistance to surface disinfectants, can be used in food processing companies, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 1, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: mid sheen
Consumption: approx. 130 ml/m²

Item/pallet	Packaging unit
72	2,5 l
60	5 l
36	10 l
32	12,5 l

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000
Notes: The 2.5 l and 10 l container sizes are only available in the colour shade 9110 white.

PRODUCT NO. 30105

LATEX M
MATT PREMIUM EMULSION PAINT

Latex M is a high-quality, dead-matt emulsion paint. The product is abrasion-resistant and is suitable for wall areas in interiors subject to high levels of stress.

Properties: excellent hiding power, high whiteness, texture-retaining, good resistance to surface disinfectants, can be used in food processing companies, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte), wet-scrub resistance class: 1, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 130 ml/m²

Item/pallet	Packaging unit
60	5 l
32	12,5 l

Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

PRODUCT NO. 30090

SEIDENLATEX
SILK GLOSS EMULSION PAINT

SeidenLatex is a silk gloss emulsion paint for use in private homes.

Properties: good hiding power, texture-retaining, high durability, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, wet-scrub resistance class: 2, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: mid sheen
Consumption: approx. 140 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000
Notes: The 2.5 l container size is only available in the colour shade 9110 white.

Item/pallet	Packaging unit
72	2,5 l
60	5 l
32	12,5 l

PAINTS, RENDERS, AND FILLERS
INTERIOR PAINTS

PRODUCT NO.	**MATTLATEX**			ELF	NASS-ABRIEB-KLASSE 2	DECK-KRAFT-KLASSE 2	ALL-COLOR MIX
30095	MATT EMULSION PAINT						

MattLatex is a dead-matt emulsion paint for use in private homes.

Properties: excellent hiding power, texture-retaining, high durability, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, wet-scrub resistance class: 2, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/pallet	Packaging unit
60	5 l
32	12,5 l

Special paints

PRODUCT NO.	**ISOLIERFARBE W**			NASS-ABRIEB-KLASSE 1	DECK-KRAFT-KLASSE 2	ALL-COLOR MIX
30135	WATER-BASED ISOLATING PAINT					

Isolierfarbe W is a water-based, abrasion-resistant, refurbishment paint for coating in interiors.

Properties: water-based, good insulating effect against nicotine stains, soot stains, lignin stains, and water stains, high whiteness, good hiding power, no yellowing, easy removal of soiling, wet-scrub resistance class: 1, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: matt
Consumption: approx. 140 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
72	2,5 l
60	5 l
36	10 l
32	12,5 l

PRODUCT NO.	**ISOLIERFARBE L**			NASS-ABRIEB-KLASSE 2	DECK-KRAFT-KLASSE 2	ALL-COLOR MIX
30685	SOLVENT-CONTAINING ISOLATING PAINT					

Isolierfarbe L is a water-based, solvent-containing, abrasion-resistant, refurbishment paint for coating in interiors.

Properties: optimum insulating effect against nicotine stains, soot stains, lignin stains, and water stains, high whiteness, excellent hiding power, no yellowing, free from aromatic compounds, low-tension, suitable for polystyrene, can be painted with emulsion paints, wet-scrub resistance class: 2, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
60	5 l
24	12,5 l

INTERIOR PAINTS

PRODUCT NO. **30690**		**ISOLIERSPRAY** SOLVENT-CONTAINING ISOLATING SPRAY

IsolierSpray is a solvent-containing spray for quick and effective isolation of water, nicotine, soot, grease, and oil stains. IsolierSpray is a solvent-containing spray for quick and effective isolation of water stains, nicotine stains, soot stains, grease stains, and oil stains.

Properties: good hiding power, high whiteness, very quick drying, excellent insulating effect, no yellowing, free from aromatic compounds, suitable for polystyrene
Gloss level: dead-matt
Consumption: approx. 60 - 80 ml/m²
Farbton:
9110 white

Item/pallet	Packaging unit
696	**6 x 400 ml**

PRODUCT NO. **30140**		**FUNGISTOP** ANTI-MOULD PAINT FOR INTERIOR AREAS

NASS-ABRIEB-KLASSE **2** · DECK-KRAFT-KLASSE **2** · ALL-COLOR MIX

FungiStop is an interior paint equipped with active ingredients and a long-lasting effect for the efficient refurbishment of mould-infested surfaces.

Properties: long-lasting effect against mould, high whiteness, good hiding power, water vapour diffusion open, can be used in food processing companies, wet-scrub resistance class: 2, contrast ratio: class 2 for 7 m²/l, maximum grain size: fine
Gloss level: dead-matt
Consumption: approx. 140 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in pastel colour shades.
All-Color tinting bases:
9110 white

Item/pallet	Packaging unit
72	**2,5 l**
60	**5 l**
32	**12,5 l**

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

Bionic paints

PRODUCT NO. **30025**		**LOTUSAN® THERM** BIONIC FACADE PAINT WITH LOTUS-EFFECT® AND FILM PROTECTION	

Lotusan® Therm is a silicone facade paint with Lotus-Effect® Technology and optimum film protection against algae and fungi. The product is water-repellent, water vapour permeable, offers maximum protection against algae and fungi, and ensures that facades stay nice and dry. Dirt runs off with the rain.

Properties: extreme non-wettability with water, strongly reduced adhesion of dirt particles, self-cleaning when exposed to rain, highest protection against algae and fungal attack, with biocide film protection, ideal protection against humidity and soiling, mineral, particularly matt surface, water permeability rate: w = 0.05 kg/m²h0.5, water vapour diffusion: sd = 0.01 m
Gloss level: matt
Consumption: approx. 170 - 200 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/pallet	Packaging unit
60	5 l
32	12,5 l

PRODUCT NO. **30020**		**LOTUSAN®** BIONIC FACADE PAINT WITH LOTUS-EFFECT®	

Lotusan® is a silicone facade paint with Lotus-Effect® Technology. The product is water-repellent, water vapour permeable, offers increased natural protection against algae and fungi, and ensures that facades stay nice and dry. Dirt runs off with the rain.

Properties: extreme non-wettability with water, strongly reduced adhesion of dirt particles, self-cleaning when exposed to rain, increased natural protection against algae and fungal attack, without biocide film protection, ideal protection against humidity and soiling, mineral, particularly matt surface, water permeability rate: w = 0.05 kg/m²h0.5, water vapour diffusion: sd = 0.01 m
Gloss level: matt
Consumption: approx. 170 - 200 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/pallet	Packaging unit
60	5 l
32	12,5 l

PRODUCT NO. **30910**		**DRYTEC®** BIONIC FACADE PAINT FOR ALL SUBSTRATES	

Drytec® is a facade paint with a bionic surface effect as protection against algae and fungal attack. The product is an all-purpose, matt facade paint.

Properties: highly water-repellent, high weatherability, resistant to driving rain, excellent adhesion on a wide range of substrates, texture-retaining, excellent hiding power, good carbon dioxide impermeability: sd CO_2 > 50 m, without film conservation, also suitable for moisture-insensitive surfaces with an inclination up to 45°
Gloss level: matt
Consumption: approx. 120 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/pallet	Packaging unit
72	2,5 l
36	10 l

FACADE PAINTS

| PRODUCT NO. **30017** | | **DRYTEC® HOLZPROTECT**
BIONIC WEATHER PROTECTION PAINT FOR WOODEN SURFACES |

Drytec® HolzProtect is a covering weather protection paint with bionic effect for timber and engineered woods in exteriors.

Properties: perfect protection for wooden surfaces, rapid drying after rain and dew formation, very good weatherability
Gloss level: matt
Consumption: approx. 120 - 150 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white Basis 0030
Basis 0070 Basis 0000

Item/pallet	Packaging unit
360	**6 x 750 ml**
72	**2,5 l**
36	**10 l**

Silicone resin emulsion paints

| PRODUCT NO. **30075** | | **SILICONTHERM**
SILICONE FACADE PAINT WITH FILM PROTECTION |

SiliconTherm is a high-quality, facade paint on a silicone resin base for facade surfaces. The product has technical protection against algae and fungi thanks to an encapsulated film preservative with long-lasting effect.

Properties: water permeability rate: w = 0.1 kg/m²h0.5, water vapour diffusion: sd < 0.1 m, high water-vapour transmission rate, highly water-repellent, low-tension, with film protection
Gloss level: matt
Consumption: approx. 170 - 200 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white Basis 0030
Basis 0070 Basis 0000
Notes: The 2.5 l container size is only available in the colour shade 9110 white.

Item/pallet	Packaging unit
360	**1 l**
72	**2,5 l**
60	**5 l**
32	**12,5 l**

| PRODUCT NO. **30980** | | **VARIOSAN®**
SILICONE FACADE PAINT |

VarioSan® is a high-quality, water-repellent, water vapour permeable, silicone resin emulsion paint, with active substances against algae and fungal attack.

Properties: high water-vapour transmission rate, water-repellent, low-tension, water permeability rate: w = 0.1 kg/m²h0.5, water vapour diffusion: sd < 0.1 m
Gloss level: matt
Consumption: approx. 170 - 200 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white Basis 0030
Basis 0070 Basis 0000

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

Emulsion paints

PRODUCT NO.		**HAUSFARBE**
30840		ALL-PURPOSE FACADE PAINT

HausFarbe is an all-purpose, matt facade paint on a pure acrylate base for all load-bearing substrates. The product protects the facade against algae attack and fungal attack thanks to its additional film protection.

Properties: all-purpose use, highly water-repellent, high weatherability, resistant to driving rain, excellent adhesion on a wide range of substrates, texture-retaining, with film protection, corrosion-inhibiting (flash rust), water permeability rate: w = 0.05 kg/m²h0.5, water vapour diffusion: sd < 0.1 m, carbon dioxide permeability: sd CO_2 > 50 m
Gloss level: matt
Consumption: approx. 120 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:

9110 white	Basis 0030
Basis 0070	Basis 0000

Item/pallet	Packaging unit
60	**5 l**
32	**12,5 l**

PRODUCT NO.		**RENOCRYL®**
30041		PURE ACRYLATE FACADE PAINT

RenoCryl® is a high-quality, ready-to-use facade paint with a pure acrylate base, for all load-bearing substrates.

Properties: high colour stability, low-tension, excellent adhesion, water permeability rate: w < 0.05 kg/m²h0.5 (W3 low), water vapour diffusion: approx. 1.2 m (V2 medium)
Gloss level: matt
Consumption: approx. 150 - 200 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:

9110 white	Basis 0030
Basis 0070	Basis 0000

Item/pallet	Packaging unit
360	**1 l**
60	**5 l**
32	**12,5 l**

PRODUCT NO.		**VARIOSIL®**
30055		SILICONE-REINFORCED FACADE PAINT

VarioSil® is a silicone-modified, filling, matt, and weather-resistant facade paint. The product levels texture differences and slight colour shade deviations, has low tension, and is water vapour permeable.

Properties: silicone modified, high water-vapour transmission rate, levelling texture differences, levelling slight colour shade differences, low-tension, filling, water permeability rate: w = 0.05 kg/m²h0.5, water vapour diffusion: sd = 0.13 m
Gloss level: matt
Consumption: approx. 200 - 250 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:

9110 white	Basis 0030
Basis 0070	Basis 0000

Item/pallet	Packaging unit
72	**2,5 l**
60	**5 l**
32	**12,5 l**

FACADE PAINTS

Silicate paints

PRODUCT NO.		SOLSILIKAT FASSADENFARBE
30950		COLLOIDAL SILICA, SILICATE FACADE PAINT

SolSilikat Fassadenfarbe is a high-quality, all-purpose, ready-to-use facade paint on a colloidal silica base for organic and mineral substrates.

	Item/pallet	Packaging unit

Properties: highly water-repellent, high CO_2- and water-vapour transmission rate, good weatherability, solvent-free, plasticiser-free, water permeability rate: w = 0.1 kg/m²h0.5, water vapour diffusion: sd < 0.1 m

| | 60 | 5 l |
| | 32 | 12,5 l |

Gloss level: matt
Consumption: approx. 150 - 200 ml/m²
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

PRODUCT NO.		SILIKAT FASSADENFARBE
30045		SILICATE FACADE PAINT

Silikat Fassadenfarbe is a ready-to-use, silicate emulsion paint in accordance with DIN 18363 for high water vapour permeable facade coatings.

	Item/pallet	Packaging unit

Properties: moisture-regulating, ready-to-use, highly water-repellent, high CO_2- and water-vapour transmission rate, good weatherability, texture-retaining, water permeability rate: w = 0.1 kg/m²h0.5, water vapour diffusion: sd < 0.1 m

| | 60 | 5 l |
| | 32 | 12,5 l |

Gloss level: matt
Consumption: approx. 150 - 200 ml/m²

Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

INTERIOR SYSTEMS

INTERIOR SYSTEMS

MOULD REMEDIATION
– Cleaning agents
– Primers
– Bonding and reinforcing mortars
– Insulation boards
– Fillers

MOULD REMEDIATION

Cleaning agents

PRODUCT NO. 30485	SCHIMMEL-FRESSER CLEANING AGENTS

Schimmel-Fresser is a spray for removing mould, mould stains, bacteria, and algae.

Properties: bleaching effect, reacts within minutes
Consumption: approx. 100 ml/m²
Substrate: Tiles, joints, walls, ceilings, masonry, timber, and plastics
Farbton:
colourless
Warning: The product contains biocides. Use biocides with care. Always read the label and product information before use.

Item/pallet	Packaging unit
2048	8 x 250 ml
480	12 x 500 ml
60	10 l

PRODUCT NO. 30015	FUNGAN® DISINFECTANT SOLUTION

Fungan® is a biocide-containing, water-based, active ingredient solution for the treatment of algae attack, fungal attack, or mould infestation.

Properties: highly effective against algae and fungi, water-repellent, disinfectant, high effectivity, transparent, ready-to-use
Consumption: approx. 150 - 300 ml/m²
Farbton:
colourless
Warning: The product contains biocides. Use biocides with care. Always read the label and product information before use.

Item/pallet	Packaging unit
90	5 l
60	10 l

Primers

PRODUCT NO. 30012	THIXGRUND GEL PRIMER

ThixGrund is an all-purpose primer with gel technology, tested for harmful substances, for interiors and exteriors.

Properties: absorbency-regulating, surface-consolidating, adhesion-promoting, minimal drip tendency due to innovate gel technology, high penetration capacity, colourless, low-emission, solvent-free, plasticiser-free, free from substances that contribute to ´black dust´ on walls, TÜV SÜD - testing for health-relevant ingredients and emissions, regular, product and process monitoring, inspection of input materials, (www.tuvsud.com/schadstoffpruefung-bauprodukte)
Consumption: approx. 100 - 140 ml/m²

Farbton:
colourless

Item/pallet	Packaging unit
60	5 l
36	10 l

MOULD REMEDIATION

PRODUCT NO. **30005**		**FIXATIV** PURE MINERAL PRIMER		

Fixativ is a pure mineral primer and thinner. The product is suitable for pre-fixing strongly absorbent, mineral substrates.

Properties: highly substrate-consolidating, water-dilutable, good depth of penetration, absorbency-regulating, transparent
Consumption: approx. 150 - 600 ml/m²
Farbton:
colourless

Item/pallet	Packaging unit
90	**5 l**
60	**10 l**

Adhesive and reinforcing compounds

PRODUCT NO. **30870**		**SÜDWEST CLIMACOMFORT K+A MORTAR** MORTAR FOR THE KLIMAKOMFORT SYSTEM		

KlimaKomfort K+A Mörtel is a mineral adhesive and reinforcing compound for interiors.

Properties: mineral, protection from mould due to high alkalinity, very high water vapour diffusion, high adhesive strength, good adhesion, float-finishable
Consumption: 4 - 6 kg/m² Bonding, 5 kg/m² reinforcement

Farbton:
natural white

Item/pallet	Packaging unit
36	**25 kg**

Insulation boards

PRODUCT NO. **30865**		**KLIMAKOMFORT PERLIT-PLATTE** BOARD FOR THE KLIMAKOMFORT SCHIMMELSANIERUNGSSYSTEM		

KlimaKomfort Perlit-Platte is a moisture-regulating, capillary-active, mineral mould refurbishment board based on the natural volcano rock perlite.

Properties: mineral, protection from mould due to high alkalinity, support of the moisture-regulating and capillary active properties of the SÜDWEST Klima-Komfort Schimmelsanierungssystem, very high water vapour diffusion, quick application of incurring water in the board, excellent drying, thermal conductivity group: 055, building material class A1 (non-combustible) in accordance with EN 13501-1
Format: 625 x 416 mm

Item/pallet	Packaging unit
18	**12 Stück/ Karton**

PRODUCT NO. **30975**		**KLIMAKOMFORT SCHIMMELSANIERUNGSKEIL** WEDGE SHAPE FOR THE KLIMAKOMFORT SCHIMMELSANIERUNGSSYSTEM		

KlimaKomfort Schimmelsanierungskeil is a mineral insulation wedge for the transition between the KlimaKomfort Schimmelsanierungssystem and wall areas and ceiling areas.

Properties: mineral, protection from mould due to high alkalinity, very high water vapour diffusion, high stability, very easy to cut to size, smooth surface, free-style textured render for fine-textured, freely-decorated surfaces, transparent binding agent with coloured stone granulate
Format: 365 x 595 mmthickness: 25 mm with tapering to 5 mm

Item/pallet	Packaging unit
120	**10 Stück/ Karton**

INTERIOR SYSTEMS
MOULD REMEDIATION

Fillers

PRODUCT NO. **30710**		**RAPID SPACHTEL** CEMENT FILLER

Rapid Spachtel is a highly modified cement filler in powder-form for fast overcoating of wall areas and ceiling areas in interiors.

Properties: rapid drying, sanding at 4 mm layer thickness possible after 3 hours, excellent adhesion on difficult substrates, e.g. tiles, glass, and gloss substrates, highly suitable for sanding, layer thickness up to 50 mm possible in one application cycle, suitable for rooms exposed to moisture
Consumption: approx. 1,00 kg/m² per mm layer thickness
Farbton:
white
Notes: surface quality: Q1-Q4 in accordance with DIN 18180

Item/ pallet	Packaging unit
140	**5 kg**
42	**15 kg**

PRODUCT NO. **30875**		**KLIMAKOMFORT PERLIT-SPACHTEL** FILLER FOR THE KLIMAKOMFORT SCHIMMELSANIERUNGSSYSTEM

KlimaKomfort Perlit-Spachtel is a mineral filler for filling defects, spalling, and board joints in the SÜDWEST KlimaKomfort Schimmelsanierungsystem.

Properties: mineral, protection from mould due to high alkalinity, support of the moisture-regulating and capillary active properties of the SÜDWEST Klima-Komfort Schimmelsanierungssystem, very high water vapour diffusion, good resistance to flow, non-hydrophobic
Consumption: approx. 2 kg/m² depends on the project and application

Farbton:
white-grey

Item/ pallet	Packaging unit
35	**35 l**

FLOOR AND ROOF COATINGS

FLOOR AND ROOF COATINGS

FLOOR COATINGS

PRODUCT NO. **30059**		**WIKULAC** SPECIAL PRIMER		

Area of application: Wikulac is a colourless primer for the consolidation of absorbent, mineral substrates. The product is used for preventing rising damp, for preventing efflorescence, and for reducing absorption capacity. Wikulac is a colourless primer for the consolidation of absorbent, mineral substrates. The product is used for preventing rising damp, for preventing efflorescence, and for reducing absorption capacity.

Properties: TÜV seal of quality – externally monitored (StoLook Decor Fine and Medium), reacts with moisture to produce a highly resistant plastic
Gloss level: colourless
Substrate: The substrates must be solvent-resistant and absorbent.Stone, concrete, cement render, timber

Item/ pallet	Packaging unit
6 x 1 l	330
5 l	60

PRODUCT NO. **30002**		**METHACRYL-FUSSBODENFARBE** METHACRYLATE FLOOR PAINT		

Methacryl-Fußbodenfarbe is a silk gloss, low-emission, single-component, abrasion-resistant coating for floors subject to normal strain in interiors and exteriors.

Properties: low-emission – meets the requirements of the Committee for Health-related Evaluation of Building Products, slip resistance class R11, high abrasion resistance, elastic, high durability, good weatherability, water-dilutable, resistance to diluted acids and alkalis, resistance to de-icing salt and engine oil, not for vehicles
Gloss level: silk gloss
Consumption: approx. 150 - 160 ml/m²
Substrate: (FREE 02/18)
Colour shade:
9110 white   RAL 7023 concrete grey   RAL 7032 pebble grey
All-Color factory tinting: The product is available in all colour shades with mineral pigments.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/ pallet	Packaging unit
360	1 l
72	2,5 l
36	10 l

PRODUCT NO. **30145**		**2K-EPOXISIEGEL** TWO-COMPONENT EPOXY RESIN FLOOR SEALING			

2K-EpoxiSiegel is a two-component, water-based coating for mechanically and chemically stressed wall areas and floor areas in interiors, and in weather protected outdoor areas.

Properties: gloss, water-dilutable, very good adhesion, water vapour diffusion: sd < 5 m, vehicle-accessible (e.g. with a forklift truck), resistance to chemicals, resistance to plasticisers, low-emission – meets the requirements of the Committee for Health-related Evaluation of Building Products, approved for use in food processing plants
Gloss level: gloss
Consumption: approx. 150 - 250 g/m²
Density: 1,5 g/cm³ 1,1 g/cm³
Substrate: (FREE 02/18)
Farbton:
9110 white
All-Color factory tinting: The product is available in all colour shades.
All-Color tinting bases:
9110 white   Basis 0030
Basis 0070   Basis 0000

Item/ pallet	Packaging unit
180270	Komponent-
180270	en A
4060	5 kg
4060	10 kg
	Komponent-
	en B
	1 kg
	2 kg

FLOOR COATINGS

PRODUCT NO. **30650**		**ADDITIV R** ADDITIVE FOR SKID RESISTANCE ELEVATION		

Additiv R is an additive for SÜDWEST 2K-EpoxiSiegel to achieve the skid resistance class R10 in accordance with DIN 51130.

Consumption: 250 g per 10 kg of 2K-EpoxiSiegel

Item/pallet	Packaging unit
800	**250 g**

PRODUCT NO. **30625**		**PU-SIEGEL** TRANSPARENT FLOOR AND WALL SEALING		

PU-Siegel is a transparent, silk gloss, low-emission, hard-wearing, water-based PU coating as a sealing coat for wall and floor areas in interiors and exteriors.

Properties: low-emission – meets the requirements of the Committee for Health-related Evaluation of Building Products, slip resistance class R10, high durability, easy removal of soiling, low-odour, no yellowing, block-resistant, good weatherability, good mechanical and chemical resistance
Gloss level: silk gloss
Consumption: approx. 90 - 110 ml/m²
Substrate: Load-bearing, single-component and two-component coatings on wall and floor areas, also with scattered chips
Farbton:
colourless

Item/pallet	Packaging unit
110	**2,5 l**
30	**10 l**

PRODUCT NO. **30325**		**MARKIERUNGSFARBE** SPECIAL-PURPOSE PAINT FOR MARKINGS		

Markierungsfarbe is a product for the coloured marking of carriageways, car parks, footpaths, and pallet positions in interiors and exteriors.

Properties: very quick drying, high load-bearing capacity
Gloss level: matt
Consumption: approx. 350 ml/m²
Substrate: Concrete, macadam covers, bitumen, and paving stones
Colour shade:

9110 white	RAL 3020 traffic red	9105 black
RAL 5017 traffic blue	RAL 1023 traffic yellow	

All-Color factory tinting: The product is available in all intense RAL colour shades.
All-Color tinting bases:
Basis 0000
Notes: The colour shade RAL 1023 traffic yellow is an approximate colour shade and is only available in the 2.5 litre container size.

Item/pallet	Packaging unit
528	**6 x 750 ml**
144	**4 x 2,5 l**
39	**10 l**

ROOF COATINGS

PRODUCT NO. **30059**		**WIKULAC** SPECIAL PRIMER

Area of application: Wikulac is a colourless primer for the consolidation of absorbent, mineral substrates. The product is used for preventing rising damp, for preventing efflorescence, and for reducing absorption capacity. Wikulac is a colourless primer for the consolidation of absorbent, mineral substrates. The product is used for preventing rising damp, for preventing efflorescence, and for reducing absorption capacity.

Properties: TÜV seal of quality – externally monitored (StoLook Decor Fine and Medium), reacts with moisture to produce a highly resistant plastic
Gloss level: colourless
Substrate: The substrates must be solvent-resistant and absorbent.Stone, concrete, cement render, timber

Item/pallet	Packaging unit
6 x 1 l	330
5 l	60

PRODUCT NO. **30665**		**DACH-FARBE** EMULSION PAINT FOR ROOFS

Dach-Farbe is a weather-resistant, water-based renovation paint for the improvement and protection of stressed or weathered roof surfaces, with sufficient inclination for safe water draining.

Properties: water-based, high adhesive power, high weatherability, with film protection against algae and fungal attack, suitable for foot traffic, high elasticity
Gloss level: silk gloss
Consumption: 250 - 300 ml/m²
Substrate: Concrete, clay, fibre cement slabs, load-bearing existing coatings

Colour shade:

RAL 7016 anthracite grey	8914 natural red	8916 red brown
8911 Frankfurt red	8915 brick red	8917 dark brown

All-Color factory tinting: Other colour shades are available on request.
All-Color tinting bases:
Basis 0901

Item/pallet	Packaging unit
24	15 l

OTHER

OTHER

TINTING SYSTEMS
TOOLS
INDEX

ALL-COLOR TINTING SYSTEMS

SÜDWEST All-Color Mix

– State-of-the-art tinting systems for any application.
– Single-component solvent-containing, two-component solvent-containing, and water-based.
– Every tinting system assigned product-specific colorants/ paint concentrates, ensures maximum product reliability. We guarantee maximum colour reliability for our facade products through increased use of mineral colorants.
– Identical formulations for factory-made products.
– Endless variety of colour shades – over 3,000,000 formulations can be mixed.
– Optionally equipped with colour spectrometer – so that any colour shade can be formulated and stored on site.
– Guarantees quick and easy tinting, whether automatic or manual.
– Dosing system can be custom-adapted to the tinting properties/volume
– 'Tint-Online' flexible formulation software for every company

All-Color AquaMix

– Environmentally friendly tinting system for water-based paints, lacquers, and coatings.
– Guaranteed colour fastness and good hiding power thanks to wide selection of pigments, particularly for silicone and silicate paints.

All-Color ClassicMix

– Innovative lacquer-in-lacquer system.
– For single-component lacquers, wood stains, and specialities.
– All tinted products have the same outstanding properties as our factory-quality products.
– Products free from aromatic compounds.
– State-of-the-art tinting technology enables quick and effective tinting.
– Transparent pricing system.

All-Color ClassicMix 2K

– Two-component lacquer system for extremely high mechanical and chemical stress.
– High-quality smooth or textured surfaces.
– Proven lacquer-in-lacquer quality.
– Single-price system.

The formulation service

– Quick, optimised measuring and creation of the desired colour shade.
– The colour shade collections
– The colour shades on the "All-Color" fan are specially tailored to the requirements of colour design in the field of construction. The base colours are brightened or darkened evenly in a systematic manner.
– The colour shades on the "All-Color Nr. 1 Farbtöne" fan add 300 colour shades with extremely high colour retention and ageing resistance to the tried-and-tested All-Color collection.
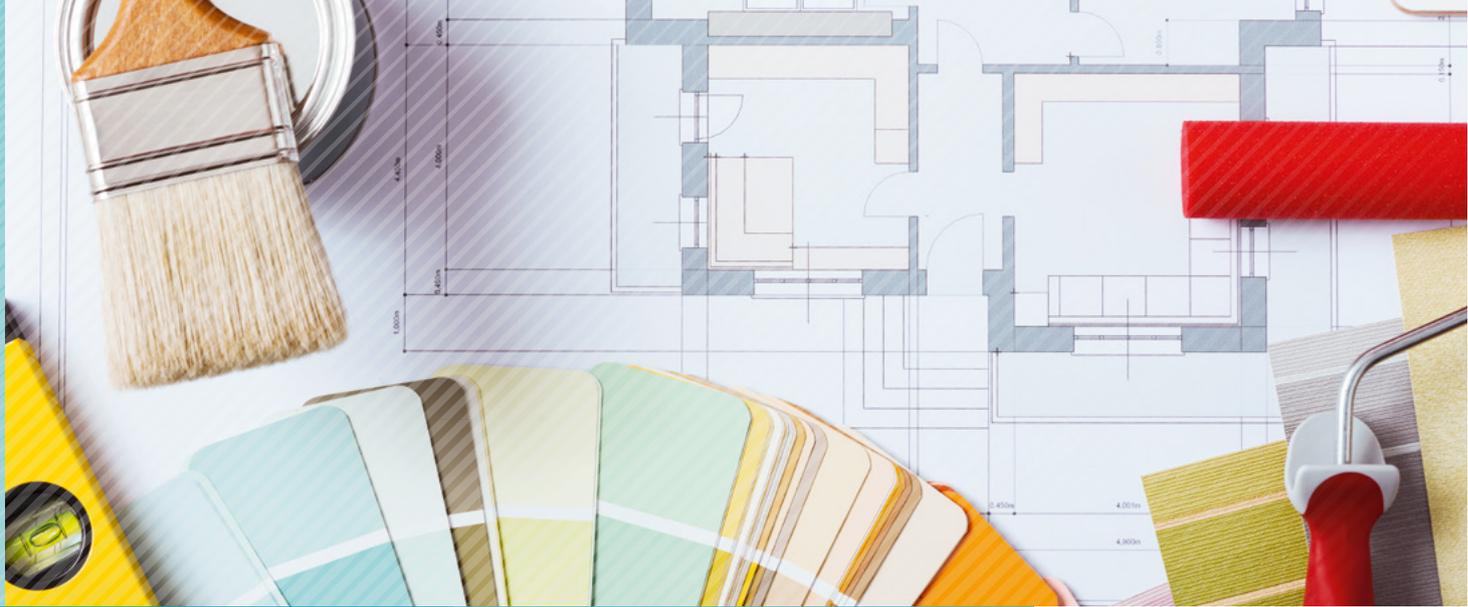
EXCELLENT COLOUR ADVICE

SÜDWEST COLOUR STUDIO

The SÜDWEST colour studio provides professional advice when it comes to colour design for your customers. The studio creates facades on a computer prior to execution. Clients get the facade of their dreams and, as a professional, you have the expertise of our specialists to support you.

FOCUSING ON THE CUSTOMER'S WISHES

The client discusses the details of the project with the advisor from the colour studio. What ideas and wishes does the customer have? This phase comprises an on-site meeting as well as digital exchange of photos and construction plans.

INDIVIDUAL COLOUR CONCEPT

The SÜDWEST colour studio then develops an individual colour concept based on the customer's ideas. The customer receives a preview of the final concept. Once it has been approved, it is produced in large-format, true-colour images, with all key information about the selected colour shades, specific products, etc.

EVERYONE KNOWS THEIR CRAFT

The SÜDWEST colour studio opens up new possibilities for every project. Clients can count on professional advice and results. As a professional, you can collaborate with the experts from SÜDWEST and obtain precise advice about the appropriate selection of colours and products.

ALL PROJECTS WELCOME

The SÜDWEST colour studio will take on any kind of project. Detached house or residential estate; private, commercial, or public; for exteriors or interiors – our experts will create high-quality design concepts and support every project from beginning to end.

ClassicMix

All-Color ClassicMix Lacquer concentrates	Designation	Product number	Material group	Container
	6219 translucent yellow	30390-001	inorganic	1 litre
	6312 translucent red	30390-002	inorganic	
	7920 yellow	30390-003	organic	
	7921 red	30390-004	organic	
	7922 oxide red	30390-005	inorganic	
	7923 oxide yellow	30390-006	inorganic	
	7924 magenta	30390-007	organic	
	7925 black	30390-008	inorganic	
	7926 white	30390-009	inorganic	
	7927 bismuth yellow	30390-010	inorganic	
	7928 green	30390-011	organic	
	7929 blue	30390-012	organic	
	7930 orange	30390-013	organic	
	7931 purple	30390-014	organic	
	7932 black reduced	30390-015	inorganic	
	7933 extender	30390-016	inorganic	
All-Color ClassicMix Sikkatv P	5109	30295-001		1 litres

All-Color ClassicMix Products	Product number	All-Color ClassicMix Bases	Pre-filling	Container
LACQUERS, SOLVENT-CONTAINING				
All-Grund Mix	30365	Base 0080	100 %	375 ml, 750 ml, 2.5 litres
		Base 0000	90 %	
All-Deck Vorlack	30505	9110 white	100 %	375 ml, 750 ml, 2.5 litres
All-Deck Buntlack Satin	30380	Base 0080	98 %	375 ml, 750 ml, 2.5 litres
		Base 0030	95 %	
		Base 0000	85 %	
		Base 0700	70 %	
All-Deck Buntlack Hoch-glanz	30375	Base 0080	98 %	375 ml, 750 ml, 2.5 litres
		Base 0030	95 %	
		Base 0000	85 %	
		Base 0700	70 %	
All-Deck Metallic Lack Satin	30720	Base 0080 (metallic)	100 %	750 ml (in 1-litre container)
Venti Plus	30039	Base 0080	98 %	375 ml, 750 ml, 2.5 litres
		Base 0000	85 %	
Heizkörper Lack	30495	9110 white	100 %	375 ml, 750 ml, 2.5 litres
Super-Dickschutz Uni	30048	9110 white	100 %	375 ml, 750 ml, 2.5 litres, 10 litres
		Base 0000	90 %	
Super-Dickschutz EG	30835	Base EG	90 %	375 ml, 750 ml, 2.5 litres, 10 litres
Metallic Lack mit Hammer-schlageffekt	30240	0013 light grey	100 %	375 ml, 750 ml, 2.5 litres
LBN-300	30310	Base 0080	98 %	1 litre, 5 litres
		Base 0000	90 %	
LBN-400	30315	Base 0080	98 %	1 litre, 5 litres
		Base 0000	90 %	
Markierungsfarbe	30325	Base 0000	90 %	750 ml, 2.5 litres, 10 litres
INTERIOR PAINTS				
Isolierfarbe L	30685	9110 white	100 %	5 litres, 12.5 litres

ClassicMix

All-Color ClassicMix Products	Product number	All-Color ClassicMix Bases	Pre-filling	Container
WOOD PRESERVATION, SOLVENT-CONTAINING				
Holz-Isolier-Grund	30290	9110 white	100 %	750 ml, 2.5 litres, 10 litres
Imprägnier-Lasur	30275	0901 colourless	100 %	750 ml, 2.5 litre, 5 litres, 10 litres
Hybrid Holz-Lasur	30004	0901 colourless	100 %	750 ml, 2.5 litres, 10 litres
Flächen-Lasur	30280	0901 colourless; 9110 white	100 %	375 ml, 750 ml, 2.5 litres, 5 litres, 10 litres
Patina-Lasur	30845	Base 9320	100 %	750 ml, 2.5 litres, 5 litres
Holz-Öl	30009	0001 natural	100 %	1 litre, 2.5 litres, 5 litres
Fassaden-Öl	30011	0001 natural	100 %	1 litre, 2.5 litres, 5 litres

ClassicMix 2K

2K-Acryl-Lack Basistöne	Designation	Product number	Container
DISCONTINUED ARTICLES	0115 yellow	30205-001	
	0118 oxide yellow	30205-002	
	0120 orange	30205-003	
	0133 red	30205-004	
	0144 burgundy	30205-005	
	0150 dark blue	30205-006	3.5 litres
	0153 blue	30205-007	
	0160 green	30205-008	
	0180 oxide red	30205-009	
	0196 black	30205-010	
	0190 white	30205-011	
	0190 white	30205-012	10 litres
2K-Acryl-Lack Mattierungszusatz DISCONTINUED ARTICLES		30445-001	3 litres

All-Color AquaMix Colorant	Designation	Product number	Material group	Container
	06531 BLU	30615-001	organic	1 litres
	06550 TY	30615-002	inorganic	
	06552 TR	30615-003		
	06556 TW	30615-004		
	06533 KBL	30615-005		
	06508 SBL	30615-006		
	06516 OG	30615-007		
	06517 G2GXD	30615-008	organic	
	06519 FGR	30615-009		
	06523 PG	30615-010		
	06526 CGR	30615-011	inorganic	
	06532 CV	30615-012	organic	
	06536 BV	30615-013	inorganic	
	06547 OR	30615-014		
	06548 OS530	30615-015		
	06557 G100	30615-016		
	06558 CR100	30615-017		
	06559 SGN	30615-018	organic	
	06560 CS	30615-019	inorganic	
	15547 ROSA E	30615-020	organic	
	16580 PO2R	30615-021	inorganic	

All-Color AquaMix Colorant	Product number	Base designation	Pre-filling	Container
CONSTRUCTION LACQUERS, WATER-BASED				
AquaVision® All-Grund	30565	9110 white	100 %	375 ml, 750 ml, 2.5 litres, 10 litres
AquaVision® PU-Vorlack	30600	9110 white	100 %	750 ml, 2.5 litres
		Base 0000	90 %	
AquaVision® PU-Buntlack Satin	30770	Base 0080	100 %	375 ml, 750 ml, 2.5 litres, 5 litres
		Base 0030	97 %	
		Base 0000	92 %	
AquaVision® PU-Buntlack Hochglanz	30815	Base 0080	100 %	375 ml, 750 ml, 2.5 litres
		Base 0030	97 %	
		Base 0000	92 %	
AquaVision® 2K-Seiden-mattlack	30043	9110 white	100 %	750 ml, 2.5 litres
		Base 0000	92 %	
AquaVision® Venti Satin	30880	Base 0080	97 %	750 ml, 2.5 litres
		Base 0000	94 %	
Aqua Alu-Effectlack	30510	9318 brilliant silver	100 %	750 ml, 2.5 litres
AquaVision® Schultafel-Lack	30940	Base 0000	92 %	375 ml, 750 ml, 2.5 litres
WOOD PRESERVATIVES, WATER-BASED				
AquaVision® Flächen-Lasur	30250	0901 colourless	100 %	375 ml, 750 ml, 2.5 litres, 5 litres
		9118 isolating white	100 %	
AquaVision® Holzfarbe	30930	Base 0080	97 %	375 ml, 750 ml, 2.5 litres, 5 litres, 10 litres
		Base 0000	94 %	
AquaVision® Holz-Öl	30021	Base 0901	100 %	375 ml, 1 litre, 2.5 litres, 5 litres
Drytec® HolzProtect	30017	9110 white	100 %	750 ml, 2.5 litres, 10 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Wachs-Lasur	30955	0901 colourless	100 %	375 ml, 750 ml, 2.5 litres, 10 litres

AquaMix

All-Color AquaMix Tinting bases	Product number	Base designation	Pre-filling	Container
ROOF AND FLOOR COATINGS				
2K-EpoxiSiegel	30145	9110 white	100 %	5 kg + 1 kg, 10 kg + 2 kg
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Dach-Farbe	30665	Base 0901	94 %	15 litres
Methacryl-Fußbodenfarbe	30002	9110 white	100 %	1 litre, 2.5 litres, 10 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
INTERIOR PAINTS				
GrundierFarbe	30755	9110 white	100 %	5 litres, 12.5 litres
Bio-StreichPutz	30085	natural white	100 %	8 kg, 25 kg
DekoStar	30730	Base 0090	100 %	5 litres, 12.5 litres
Profi XXL	30006	9110 white	100 %	1 litre, 2.5 litres, 5 litres, 10 litres, 12.5 litres, 15 litres
EuroClassic	30013	9110 white	100 %	1 litre, 2.5 litres, 5 litres, 10 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
DIN Weiss	30056	9110 white	100 %	12.5 litre, 30 litres, 120 litres
Latex HG	30100	9110 white	100 %	5 litres, 12.5 litres
Latex SG	30150	9110 white	100 %	2.5 litres, 5 litres, 10 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	5 litres, 12.5 litres
		Base 0000	97 %	
Latex M	30105	9110 white	100 %	5 litres, 12.5 litres
SeidenLatex	30090	9110 white	100 %	2.5 litres, 5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	5 litres, 12.5 litres
		Base 0000	97 %	
MattLatex	30095	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Bio-InnenSilikat	30049	9110 white	100 %	2.5 litres, 5 litres, 10 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	2.5 litres, 5 litres, 12.5 litres
		Base 0000	97 %	
SilikatTopIn	30945	9110 white	100 %	5 litres, 12.5 litres
SilcoTopIn	30735	9110 white	100 %	5 litres, 12.5 litres
Isolierfarbe W	30135	9110 white	100 %	2.5 litres, 5 litres, 10 litres, 12.5 litres
FungiStop	30140	9110 white	100 %	2.5 litres, 5 litres, 10 litres, 12.5 litres
PLASTERS/RENDERS				
Bio-InnenPutz	30026 30027 30029	9110 white	100 %	25 kg
Bio-DekorPutz	30028	9110 white	100 %	25 kg

All-Color AquaMix Tinting bases	Product number	Base designation	Pre-filling	Container
FACADE PAINTS				
RissGrund 1 für 3	30030	9110 white	100 %	5 litres, 12.5 litres
RissGrund faserarmiert	30035	9110 white	100 %	5 litres, 12.5 litres
Lotusan® Therm	30025	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Lotusan®	30020	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Drytec®	30910	9110 white	100 %	2.5 litres, 10 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Drytec® HolzProtect	30017	9110 white	100 %	750 ml, 2.5 litres, 10 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
SiliconTherm	30075	9110 white	100 %	1 litre, 5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
VarioSan®	30980	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
VarioSil®	30055	9110 white	100 %	2.5 litres, 5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
HausFarbe	30840	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
RenoCryl®	30040	9110 white	100 %	1 litre, 5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
SolSilikat Fassadenfarbe	30950	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	
Silikat Fassadenfarbe	30045	9110 white	100 %	5 litres, 12.5 litres
		Base 0070	100 %	
		Base 0030	100 %	
		Base 0000	97 %	

OTHER
TINTING SYSTEMS

All-Color AquaMix

PRODUCT NO. **30615**		**ALL-COLOR AQUAMIX COLORANT**
		PIGMENT CONCENTRATE

Use All-Color AquaMix Colorant for tinting SÜDWEST AquaMix products.		Item/pallet	Packaging unit
Colour shade:		360	**1 l**

06531 BLU	06517 G2GXD	06548 OS530
06550 TY	06519 FGR	06557 G100
06552 TR	06523 PG	06558 CR100
06556 TW	06526 CGR	06559 SGN
06533 KBL	06532 CV	06560 CS
06508 SBL	06536 BV	15547 ROSA E
06516 OG	06547 OR	16580 PO2R

All-Color ClassicMix

PRODUCT NO. **30295**		**CLASSICMIX SIKKATIV P**
		DRYING AGENT

All-Color ClassicMix Sikkativ P is a drier for solvent-based synthetic resin varnishes.	Packaging unit
	1 l

PRODUCT NO. **30390**		**ALL-COLOR CLASSICMIX TÖNKONZENTRAT**
		PIGMENT CONCENTRATE

Use All-Color ClassicMix Tönkonzentrate for tinting SÜDWEST ClassicMix products.	Packaging unit
Colour shade:	**1 l**

6219 translucent yellow	7924 magenta	7930 orange
6312 translucent red	7925 black	7931 violet
7920 yellow	7926 white	7933 extender
7921 red	7927 bismuth yellow	7932 Schwarz LC
7922 oxide-red	7928 green	
7923 oxide-yellow	7929 blue	

EXPLANATION OF THE SYMBOLS

1000
Area of application

1010
Exterior application only

1020
Interior application only

1030
Interior and exterior application

1060
Interior application, only floors

1070
Interior and exterior application on floors

1080
Interior application – walls and ceilings

1090
Application only on roof

2000
Application conditions

2010
Lowest application temperature

2020
Highest application temperature

3000
Preparation

3100
Shake

3200
Components

3210
Component A

3220
Component B

3300
Mixing ratio

3311
Mixing ratio of product and water by volume

3312
Mixing ratio of product and solvent by volume

3321
Mixing ratio of product and water by weight

3324
Mixing ratio for components by weight

3327
Mixing ratio of water to product

3400
Addition

+1%
3420
Amount to be added in %

+1% max.
3430
Maximum amount to be added

3440
Addition of water

3450
Addition of solvent

3460
Water-dilutable

3470
Solvent-dilutable

3480
Solvent-dilutable. Free from aromatic compounds

3500
Stirring, maturing time, transfer to clean container and remix

3510
Transfer to clean container and remix

3520
Stir

3530
Minimum stirring time

3540
Waiting time until application (maturing time) at 20 °C / 65 % rel. humidity

4000
Application

4110
Pot life, max. time for application at 20 °C / 65 % rel. humidity

4200
Application methods

4210
By paint brush, slurry, brush

4220
By roller

4230
Airless spraying

4240
Wet-mix spraying / application with screw pump

4260
Apply with plastering trowel

4270
Apply with notched trowel

4280
Texturing

4290
Float-finish

4294
Spray with a hopper gun

4300
Consumption and application cycles

4310
Application cycles

4320
Consumption / minimum quantity to be applied in g/m²

4360
Consumption / minimum quantity to be applied in ml/m

4370
Consumption / minimum quantity to be applied in g/m²/mm

4400
Reworking, drying, curing

4410
Over-coatable after

4420
Drying time

4500
Cleaning

4510
Can be washed out with water

4520
Can be washed out with solvent

4600
Paints

4621
All-Color System – complete colour choice

4622
All-Color System – limited colour choice

4650
Own collection

4660
RAL

4700 Wet-scrub resistance

4710
Class 1

4720
Class 2

4730
Class 3

4800 Contrast ratio/hiding power

4810
Class 1

4820
Class 2

4830
Class 3

5200
Colour retention

5230
Good colour retention

5240
Very good colour retention

6000
Observe technical info

6010
Observe technical info

7000
Packaging

7040
Aerosol

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

Lacquers and wood coatings

Paints, plasters/renders, and fillers

Interior systems

Floor and roof coatings

Other

31975-061 / 04.2024